premium

mastercard, maestro.

All major credit cards accepted nimum credit / debit card payment £20

All major credit cards accepted imum credit / debit card payment £20.00

EQUIPMENT SPRING 2023

MY ACCOUNT REF...

freephone: 0800 009 8822 email: sales@premiumplusuk.com

shop on our website: www.premiumplusuk.com

FREE DELIMERY FOR ORDERS OMER £500
OTHERWISE £4.95 POSTAGE OR £6.50 COURIER CHARGES APPLY



CO1-M / CO2-M LED CURING LIGHTS MINI (with USB charger)

- 360° Rotatable tips
- Automatic compensation circuit for constant power output
- Fully covered membrane panel for easy cleaning and infection control
- Light weight: approx. 85 gms
- Dual modes: FULL / SOFT
- 12 Operation times
- Fully charged battery provides over 100 x 10 second curing cycles

C01-M / C02-M SPECIFICATIONS							
ı	Vlodel	C01-M (F.O. Light Guide)	CO2-M (Direct Light Source)				
LIGHT TIP		8 mm (dia.)	11 mm (dia.)				
LIGHT WAVELENGTH		440~480 nm	440~480 nm				
MODE	FULL	1,200 mW/cm² for 5, 10, 15, 20, 25, 30 seconds±10%					
₩ W	SOFT	1 st five seconds from 0-900 mW/cm ² next	t 5, 10, 15, 20, 25 seconds 900 mW/cm²±10%				
WEIGHT		86 gms	84 gms				
LENGTH		230 mm	220 mm				

C01-M / C02-M CURING LIGHT DEPTH OF CURE									
MODEL C01-M (F.O. Light Guide) Curing Time C204049 Depth Measurements (-50%) C107-M (Direct Light Source) Curing Time C107-M (Direct Light Source) Curing Time C107-M (Direct Light Source) C1									
FULL 10 seconds 4.3 mm 2.15 mm 10 seconds 5.1 mm 2.55 mm									
SOFT	SOFT 15 seconds 4.6 mm 2.30 mm 15 seconds 4.8 mm 2.40 mm								

REMARKS: Above data is based on test results using an A2 shade composite. The light tip was placed above and pointed perpendicular to the composite. Tests were done as per ISO 4049 Standard. The samples were measured and the data was divided by two (50% of the total composite depth cured). ISO 4049 Standard requires that the results for class II restorative materials should be at least 1.5 mm for non-opaque shades and 1.0 mm for opaque shades. All resins and composites have different curing times. It is recommended that you should test your resins and composites performance to determine the curing times required.



AUTOCLAVABLE FIBRE OPTIC LIGHT GUIDE CAN BE

ROTATED 360

COMPENSATION CIRCUIT FOR CONSTANT POWER OUTPUT

FULLY COVERED

SIZE: L265 x Dia.27 (mm)

> REPLACEABLE BATTERY -OPENING

FOR EASY CLEANII
AND INFECTION
CONTROL

T

• . SSF


C01

premiumilus

__ MODE

A FULL CHARGE OF BATTERY CAN BE USED MORE THAN

CO1 LED CURING LIGHTS with fibre optic light guides

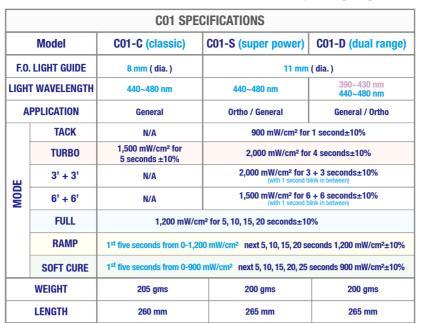

CURING	G LIGHT MODE APPLICATIONS
TACK	Tack cure, a very short initial curing for temporary processing before final cure. For example, veneer bonding or temporary cement for in-position and easy removal of excess material.
TURBO	Super fast curing for resin and composite under 2 mm thickness. Also recommended for ceramic brackets, veneer bonding etc.
3' + 3'	3 Seconds Mesial + 3 Seconds Distal for metal brackets resin bonding. (with 1 second blink in between)
6' + 6'	6 Seconds Mesial + 6 Seconds Distal for metal brackets with bonding resin requiring more curing time, and buccal tubes bonding. (with 1 second blink in between)
FULL	For general applications.
RAMP	With first 0-5 seconds ramping for general application.
SOFT CURE	With first 0-5 seconds ramping for more gentle processing, designed for the patients sensitive to the heat.

	C01-C / C01-S / C01-D CURING LIGHT DEPTH OF CURE								
MODEL	MODEL CO1-C (Classic) Curing Time Iso 4049 Depth Measurements (-50%) Super power Curing Time Super power Curing Time								
TURB0	5 seconds	4.2 mm	2.10 mm	4 seconds	4.6 mm	2.30 mm	4 seconds	4.3 mm	2.15 mm
FULL	10 seconds	4.3 mm	2.15 mm	10 seconds	5.1 mm	2.55 mm	10 seconds	4.4 mm	2.20 mm
RAMP	10 seconds	4.1 mm	2.05 mm	10 seconds	5.0 mm	2.50 mm	10 seconds	4.2 mm	2.10 mm
SOFT CURE	15 seconds	4.6 mm	2.30 mm	15 seconds	4.8 mm	2.40 mm	15 seconds	4.6 mm	2.30 mm

REMARKS:

Above data is based on test results using an A2 shade composite. The light tip was placed above and pointed perpendicular to the composite. Tests were done as per ISO 4049 Standard. The samples were measured and the data was divided by two (50% of the total composite depth cured). ISO 4049 Standard requires that the results for class II restorative materials should be at least 1.5 mm for non-opaque shades and 1.0 mm for opaque shades. All resins and composites have different curing times. It is recommended that you should test your resins and composites performance to determine curing times required.



Lavender L.Lavender

White



L. Blue

Blue

Black

I OW PROFILE HEAD FOR ACCESSING HARD-TO-REACH AREAS 12 mm STAINI ESS HARDENED GLASS LENS COLLIMATED UNIFORM STRAIGHT LIGHT BEAM LIGHT GUIDE CAN BE ROTATED 360° ON/OFF SWITCH DISPLAY SCREEN AUTOMATIC COMPENSATION CIRCUIT FOR CONSTANT T POWER OUTPUT FULLY COVERED MEMBRANE PANEL FOR EASY CLEANIN M AND INFECTION CONTROL C02-C premium A FULL CHARGE OF BATTERY CAN BE USED MORE THAN 100 TIMES WHEN SIZE: L255 x Dia.27 (mm) REPLACEABLE BATTERY OPENING

CO2 LED CURING LIGHTS 90° right angle direct light source head

CO2 SPECIFICATIONS						
	Model	CO2-C (classic)	CO2-S (super power)	CO2-D (dual range)		
DIRE	CT LIGHT HEAD		10 mm (dia.)			
LIGH	T WAVELENGTH	440~480 nm	440~480 nm	390~430 nm 440~480 nm		
A	PPLICATION	General	Ortho / General	General / Ortho		
	TACK	N/A	900 mW/cm² for	1 second±10%		
	TURBO	1,500 mW/cm² for 5 seconds ±10%	2,000 mW/cm² for 4 seconds±10%			
ш	3' + 3'	N/A	2,500 mW/cm² for 3 + 3 seconds±10% (with 1 second blink in between)			
MODE	6' + 6'	N/A	1,500 mW/cm² for 6 + 6 seconds±10% (with 1 second blink in between)			
	FULL	1,200 mW/cm² for 5, 10, 15, 20 seconds±10%				
	RAMP	1st five seconds from 0-1,200 mW/cm² next 5, 10, 15, 20 seconds 1,200 mW/cm²±10				
	SOFT CURE	1st five seconds from 0-900 mW/cm² next 5, 10, 15, 20, 25 seconds 900 mW/cm²				
	WEIGHT	185 gms	185 gms	185 gms		
	LENGTH	255 mm	255 mm			

CURING	LIGHT MODE APPLICATIONS
TACK	Tack cure, a very short initial curing for temporary processing before final cure. For example, veneer bonding or temporary cement for in-position and easy removal of excess material.
TURBO	Super fast curing for resin and composite under 2 mm thickness. Also recommended for ceramic brackets, veneer bonding etc.
3' + 3'	3 Seconds Mesial + 3 Seconds Distal for metal brackets resin bonding. (with 1 second blink in between)
6' + 6'	6 Seconds Mesial + 6 Seconds Distal for metal brackets with bonding resin requiring more curing time, and buccal tubes bonding. (with 1 second blink in between)
FULL	For general applications.
RAMP	With first 0-5 seconds ramping for general application.
SOFT CURE	With first 0-5 seconds ramping for more gentle processing, designed for the patients sensitive to the heat.

CO2-C / CO2-S / CO2-D CURING LIGHT DEPTH OF CURE										
	MODEL	CO2-C (classic) Curing Time	Depth Measurements	ISO 4049 Depth Measurements (-50%)	C02-S (super power) Curing Time	Depth Measurements	ISO 4049 Depth Measurements (-50%)	CO2-D (dual range) Curing Time	Depth Measurements	ISO 4049 Depth Measurements (-50%)
)	TURB0	5 seconds	4.4 mm	2.20 mm	3 seconds	4.6 mm	2.30 mm	3 seconds	4.5 mm	2.25 mm
	FULL	10 seconds	5.1 mm	2.55 mm	10 seconds	5.3 mm	2.65 mm	10 seconds	5.2 mm	2.60 mm
	RAMP	10 seconds	4.8 mm	2.40 mm	10 seconds	5.3 mm	2.65 mm	10 seconds	4.9 mm	2.45 mm
	SOFT CURE	15 seconds	5.0 mm	2.50 mm	15 seconds	5.4 mm	2.70 mm	15 seconds	5.1 mm	2.55 mm

12 colours available:



REMARKS:

Above data is based on test results using an A2 shade composite. The light tip was placed above and pointed perpendicular to the composite. Tests were done as per ISO 4049 Standard. The samples were measured and the data was divided by two (50% of the total composite depth cured). ISO 4049 Standard requires that the results for class II restorative materials should be at least 1.5 mm for non-opaque shades and 1.0 mm for opaque shades. All resins and composites have different curing times. It is recommended that you should test your resins and composites performance to determine curing times required.





L10-1 Straight Handniece £59.95

L20-1L Latch CA Handpiece 1:1 Standard

LOW SPEED HANDPIECES AND AIR MOTOR



L30 Air Motor (2 or 4 holes) 20,000 r.p.m. ... £69.95





Colour: White

SPECIAL

MaxPiezo 6 £155.00 £185.00 MaxPiezo 6+ MaxPiezo DS6 £155.00 MaxPiezo DS6+ £195.00

MaxPiezo 6 (EMS Type) Non-LED Scaler Set £235.00 MaxPiezo DS6+ (SATELEC Type) LED Scaler Set £295.00

REFINE Non-LED / LED TABLE TOP SCALERS

- Automatic frequency tracking, real-time feedback
- · Power and water controlled by touch panel, easy to clean for infection control
- Detachable handpiece
- Frequency: 28 kHz ± 3 kHz
- Complete with 6 tips
- Size: W155mm x D168mm x H80mm
- Weight: 0.6 kg (unit only)

ONE YEAR WARRANTY

(except scaler tips)





REFINE Non-LED / LED PORTABLE SCALERS

- Automatic frequency tracking, real-time feedback
- Extra large, capacity 600 ml water tank for water, chlorhexidine, hydrogen peroxide, sodium hypochlorite etc...
- Power and water controlled by touch panel, easy to clean for infection control
- Detachable handpiece
- Frequency: 28 kHz ± 3 kHz
- Size: W180mm x D180mm x H150mm
- Complete with 8 tips
- Weight: 1.6 kg (unit only)

SPECIAL

MaxPiezo 7 £315.00 MaxPiezo 7+ MaxPiezo DS7 £365.00 £345.00 MaxPiezo DS7+ £395.00

MaxPiezo 7 (EMS Type) Portable Non-LED Scaler Set	£495.00
MaxPiezo 7+ (EMS Type) Portable LED Scaler Set	£545.00
MaxPiezo DS7 (SATELEC Type) Portable Non-LED Scaler Set	£545.00
MaxPiezo DS7+ (SATELEC Type) Portable LED Scaler Set	£595.00



ONE YEAR WARRANTY (except scaler tips)

A08 DENTAL APEX LOCATOR



24 MONTH WARRANTY

- · Bright LCD screen with the trajectory of the file being clearly indicated by different colours
- · Foldable design with adjustable view angle, saves space and protects the screen
- The unit is designed with a smooth seamless body and membrane buttons to enhance cold sterilization and help avoid cross contamination
- Advanced multiple frequency technology with automatic calibrating ensures accurate measurement
- · Measurement results are not affected by tooth type, size of root canal or the internal environment of root canal
- Different beep tones indicate the position of the file in the root canal
- Rechargeable lithium battery
- Accessories autoclavable up to 134°C
- Screen size: 110 mm x 70 mm
- Overall size: L122 mm x W118 mm x H25 mm
- Weight: 300 gms (including battery)

A08 Apex Locator £229,95 A08-1 Battery£34.95 A08-2 Spare Probe £8.95

A08-3 Spare Hook £8,95 A08-4 Spare Cord £11.95 A08-5 Spare Clip .

5 colours available:













C3RK MOBILE CART



- · Attractive design and durable construction
- 4 outlet sockets for use with electrical devices
- 3 shelf trolley
- Round shelves for safely and hygeine
 Table size: W40 cm x D30 cm
- Over all height: 78 cm
- Height between shelves: 27.5 cm

C3RK Mobile Cart £235.00

REFINE AUTOCLAVABLE SCALER HANDPIECES





HS-7H Non-LED Scaler Handpiece (SATELEC2, NSK3 Type) £109.95





HP-5L LED Scaler Handpiece (EMS1 Type) £109.95

HS-7L LED Scaler Handpiece (SATELEC2, NSK3 Type) £119.95

ONE YEAR WARRANTY



REFINE AUTOCLAVABLE SCALER TORQUE WRENCHES



TW-1L For REFINE, EMS1, SATELEC², NSK³ KAVO PiezoLED⁵ Type scaler each



TS-1L for SIRONA4 Type scaler each £12.95

£10.95



TK-1L for KAVO SONICflex⁵, SONOsoft5, Type scaler each







7H Non-LED (SATELEC² Type)



REFINE SCALER HANDPIECE HOSES

3H Non-LED (EMS1 Type) Handpiece Hose ... £3









5L LED (EMS1 Type) Handpiece Hose ... £49.95

7L LED (SATELEC² Type) Handpièce Hose ... £49.95

Handpiece Hose ... £39.95

REFINE ENDO WRENCH





REFINE **SOLENOID VALVE** each







E04 ULTRASONIC FILES NITI alloy

- · For use with ultrasonic scaler
- Excellent tenacity
- Length: 33 mm

and the second	A CONTRACTOR OF THE PARTY OF TH		, contraction
1	فالمقادة والموادوة والمادوة وا	Managarana	Chermenterment
	,	W	

E04 ULTRASONIC FILES NiTi allo				
#15 🔾	#30 🔵			
#20 🛑	#35 🔵			
#25	#40			

E04 Ultrasonic Files Single Size 6 pcs/pack

- 1. EMS is a registered trademark of Electro Medical System S.A. Switzerland
- 2. SATELEC is a registered trademark of Satelec/Acteon Group France
- 3. NSK is a registered trademark of Nakanishi Inc. Japan
- 4. SIRONA is a registered trademark of Siroa Dental System 5. KAVO, SONICflex, SONOsoft, PiezoLED are registered trademarks of Kavo Dental GmbH Germany

REFINE SCALER TIPS STAINLESS STEEL

SCALING

ENDO

FOR EMS1, SATELEC2, NSK3 and SIRONA4 REFINE Type Scalers



G1 (EMS1 Type) GD1 (SATELEC², NSK³ Type) GS1 (SIRONA⁴ Type) Supragingival deposits in all quadrants

each £13.95

G4 (EMS¹ Type) GD4 (SATELEC², NSK³ Type) GS4 (SIRONA⁴ Type) Supragingival and interproximal deposits



G2 (EMS¹ Type) GD2 (SATELEC², NSK³ Type) GS2 (SIRONA⁴ Type) Heavy supragingival deposits on anterior teeth

Comparable with NSK³ G1 Satelec² 1 each £13.95

G5 (EMS1 Type) GD5 (SATELEC², NSK³ Type) GS5 (SIRONA⁴ Type) Supragingival deposits in all quadrants



G3 (EMS¹ Type) GD3 (SATELEC², NSK³ Type) GS3 (SIRONA⁴ Type) Supragingival deposits in all quadrants, including the interproximal and

sulcus areas

G6 Comparable with EMS¹ Type C NSK³ G2 Satelec² 2 each £13.95

G6 (EMS¹ Type) GD6 (SATELEC², NSK³ Type) GS6 (SIRONA⁴ Type) Voluminous supragingival deposits



E1 (EMS1 Type) ED1 (SATELEC², NSK³ Type) ES1 (SIRONA⁴ Type) 120°file holder for anterior root canal irrigation



E4 (EMS¹ Type) ED4 (SATELEC², NSK³ Type) ES4 (SIRONA⁴ Type) Removing root filling obstructions during root canal retreatment



E3D

Comparable with NSK³ E7D Satelec² ET18D

each £27.95

E2 (EMS1 Type) ED2 (SATELEC2, NSK3 Type) ES2 (SIRONA4 Type) 95° file holder for molar teeth root canal irrigation

ED3 (SATELEC², NSK³ Type)

E3 (EMS1 Type)

ES3 (SIRONA4 Type) Gutta-percha melting



E4D (EMS¹ Type) ED4D (SATELEC², NSK³ Type) ES4D (SIRONA⁴ Type) Removing calcification and filling material during root canal retreatment



E3D (EMS1 Type) ED3D (SATELEC2, NSK3 Type) ES3D (SIRONA4 Type) Diamond coated instrument for root canal enlarging



E5 (EMS¹ Type) ED5 (SATELEC², NSK³ Type) ES5 (SIRONA⁴ Type) Removing root filling obstructions during root canal retreatment




33.6 mm

P4D (EMS¹ Type) PD4D (SATELEC², NSK³ Type) PS4D (SIRONA⁴ Type) **Diamond coated instrument** for root canal enlarging



E5D (EMS¹ Type) ED5D (SATELEC², NSK³ Type) ES5D (SIRONA⁴ Type) Removing calcification and filling material during root canal retreatment



E14 (EMS1 Type) ED14 (SATELEC², NSK³ Type) ES14 (SIRONA⁴ Type) Removing root filling obstructions during root canal retreatments



E15 (EMS¹ Type) ED15 (SATELEC², NSK³ Type) ES15 (SIRONA⁴ Type) Removing root filling obstructions during root canal retreatments



- EMS is a registered trademark of Electro Medical System S.A. Switzerland
 SATELEC is a registered trademark of Satelec/Acteon Group France
 NSK is a registered trademark of Nakanishi Inc. Japan
 SIRONA is a registered trademark of Siroa Dental System

REFINE SCALER TIPS STAINLESS STEEL

FOR EMS1, SATELEC2, NSK3 and SIRONA4 Type Scalers

P1

P4

Comparable with NSK³ G4 Satelec² #10P

each £19.95

Comparable with EMS¹ Type DPL3

each £27.95

P3D



P1 (EMS¹ Type) PD1 (SATELEC², NSK³ Type) PS1 (SIRONA⁴ Type) Shallow pocket subgingival deposits

P3 (EMS¹ Type) PD3 (SATELEC², NSK³ Type) PS3 (SIRONA⁴ Type) Deep pocket subgingival deposits

P4 (EMS¹ Type) PD4 (SATELEC², NSK³ Type) PS4 (SIRONA4 Type) Shallow pocket subgingival deposits

PD3D (SATELEC², NSK³ Type) PS3D (SIRONA4 Type) Diamond coated instrument for root planning after periodontal flap surgery

P3D (EMS1 Type)

P2L **PERIO** each £19.95 P2R each £19 95 P2LD each £27.95

33.7 n

33.7 m

P2RD

each £27.95

P2L (EMS¹ Type) PD2L (SATELEC², NSK³ Type) Left angle instrument to remove calculus from very narrow inter-root space and furcation

P2R (EMS¹ Type) PD2R (SATELEC², NSK³ Type) Right angle instrument to remove calculus from very narrow inter-root space and furcation

P2LD (EMS¹ Type) PD2LD (SATELEC², NSK³ Type) Removal of calculus from narrow inter-root spaces (diamond-coated)

P2RD (EMS1 Type) PD2RD (SATELEC², NSK³ Type) Diamond coated instrument for root planning



FOR AMDENT⁶ Type Scalers




A1 (AMDENT⁶ Type) Supragingival scaling



A2 (AMDENT⁶ Type) Supragingival scaling


FOR KAVO SONICFIEx5 Type Scalers




GK1 (KAVO5 Type) Supragingival deposits in all quadrants



GK2 (KAVO5 Type) Supragingival heavy calculus and plaque



GK3 (KAVO⁵ Type) Supragingival interdental calculus and calculus at the neck of the tooth



GK4 (KAVO5 Type) Supragingival deposits, including the interproximal and sulcus areas



GK5 (KAVO5 Type) Subgingival calculus



GK6 (KAVO5 Type) Left angle instrument for revmoving subgingival calculus

GK7 (KAVO⁵ Type) Right angle instrument for reviewly subgingival

FOR KAVO SONOsoft⁵ Type Scalers




GC1 (KAVO⁵ Type) Supragingival deposits in all quadrants

GC2 (KAVO5 Type) Supragingival interdental calculus and calculus at the neck of the tooth PC1 (KAVO⁵ Type)

Subgingival calculus. including the interproximal and sulcus areas

KAVO PiezoLED⁵ Type Scalers



201 (KAVO⁵ Type) Supragingival and interproximal deposits

202 (KAVO⁵ Type) Supragingival deposits in all quadrants, including the interproximal and sulcus areas

203 (KAVO5 Type) Deep pocket subgingival deposits

- EMS is a registered trademark of Electro Medical System S.A. Switzerland
 SATELEC is a registered trademark of Satelec/Acteon Group France
 NSK is a registered trademark of Nakanishi Inc. Japan

- 4. SIRONA is a registered trademark of Siroa Dental System
- 5. KAVO, SONICflex, SONOsoft, PiezoLED are registered trademarks of Kavo Dental GmbH Germany
- 6. AMDENT is a registered trademark of Amdent AB Sweeden

REFINE Non-LED / LED AUTOCLAVABLE SCALER HANDPIECE KITS



- Complete with:-
- 1x Handpiece 3H / 5L / 7H / 7L
- 3x Perio scaler tip P1 / PD1
- 1x Torque wench TW-1L
- 1x Scaler tip holder No.1
 - 1x Sterilization box

3H Non-LED Handpiece Kit (EMS Type)	£265.00
7H Non-LED Handpiece Kit (SATELEC Type)	£315.00
5L LED Handpiece Kit (EMS Type)	£295.00
7L LED Handpiece Kit (SATELEC Type)	£295.00

(for handpiece connections, please refer to page Q5)



ONE YEAR WARRANTY

(except scaler tips)

SPECIAL £99.95 £109.95 7H Kit 5L(LED) Kit £109.95 7L(LED) Kit £109.95



MaxPiezo 7 (EMS Type) Portable Non-LED Scaler Set £495.00

MaxPiezo DS7 (SATELEC Type) Portable Non-LED Scaler Set ... £545.00 MaxPiezo DS7+ (SATELEC Type) Portable LED Scaler Set £595.00

MaxPiezo 7+ (EMS Type) Portable LED Scaler Set

REFINE Non-LED / LED PORTABLE SCALERS

- Automatic frequency tracking, real-time feedback
- Extra large, capacity 600 ml water tank for water, chlorhexidine, hydrogen peroxide, sodium hypochlorite etc...
- Power and water controlled by touch panel, easy to clean for infection control
- Detachable handpiece
- Frequency: 28 kHz ± 3 kHz
- Complete with 8 tips
- Size: W180mm x D180mm x H150mm
- Weight: 1.6 kg (unit only)



SPECIAL

MaxPiezo 7 £315.00 MaxPiezo 7+ £345.00 MaxPiezo DS7 MaxPiezo DS7+ £395.00

.... £545.00



ONE YEAR WARRANTY (except scaler tips)



SPECIAL

MaxPiezo 6 MaxPiezo 6+ £185.00 £155.00 MaxPiezo DS6 MaxPiezo DS6+ £195.00

MaxPiezo 6 (EMS Type) Non-LED Scaler Set	£235.00
MaxPiezo 6+ (EMS Type) LED Scaler Set	£285.00
MaxPiezo DS6 (SATELEC Type) Non-LED Scaler Set	£245.00
MaxPiezo DS6+ (SATELEC Type) LED Scaler Set	£295.00

REFINE Non-LED / LED TABLE TOP SCALERS

- · Automatic frequency tracking, real-time feedback
- Power and water controlled by touch panel, easy to clean for infection control
- Detachable handpiece
- Frequency: 28 kHz ± 3 kHz
- Complete with 6 tips
- Size: W155mm x D168mm x H80mm
- Weight: 0.6 kg (unit only)

ONE YEAR WARRANTY

(except scaler tips)





N3000 £155.00 £185.00 N3000L £155.00 V3000 V3000L £195.00

N3000 (EMS Type) Built-In Non-LED Scaler Set	£235.00
N3000L (EMS Type) Built-In LED Scaler Set	£285.00
V3000 (SATELEC Type) Built-In Non-LED Scaler Set I	£245.00
V3000L (SATELEC Type) Built-In LED Scaler Set	£295.00

REFINE Non-LED / LED BUILT-IN SCALERS

- Automatic frequency tracking. real-time feedback
- Detachable handpiece
- Frequency: 28 KHz ± 3 KHz
- · Complete with 6 tips

ONE YEAR WARRANTY

(except scaler tips)



1. EMS is a registered trademark of Electro Medical System S.A. Switzerland 2. SATELEC is a registered trademark of Satelec/Acteon Group France

Terms and Conditions

All prices shown are VAT exclusive. All prices, including delivery, special deals and products are subject to change without prior notice. Premium Plus reserves the right to correct errors and omissions in any of our advertising (paper or electronic). Catalogues (prices and specials) will be deemed to be superseded on the issue of the most recent catalogue/ flyer. Goods will not be accepted for return without prior authorisation. Customers must notify Premium Plus of a return within 7 days of the most recent catalogue/ flyer. Goods will not be accepted for return without prior authorisation. Customers must notify Premium Plus of a return within 7 days from the date of delivery. Returned goods received after this time or without prior authorisation may not be accepted. Costs incurred for the return of goods will be at the Customers expense, except in cases of incorrectly supplied or faulty goods. Returned goods must be in a re-saleable condition (inclusive of all original packaging, unopened and unused). Credit accounts are due strictly 30 days from the invoice date. In the event that the Customer fails to pay any monies by the due date, interest may be charged at the rate of 2% interest per month. The Customer is liable for all costs incurred by Premium Plus in the recovery of any debt, including legal fees and any other associated costs. Premium Plus retains ownership of the goods until they are paid in full. Premium Plus shall endeavour to dispatch all orders received before 3pm for either next working day delivery or 1st Class Post dependant on order weight and value. However, delivery dates and times specified are approximate only. Premium Plus cannot guarantee delivery times and will not be held liable or responsible if any timeframes cannot be met. Substitute goods may be supplied when those ordered are unavailable. Equipment warranties are as stated in catalogues/flyers or instructions and are considered void if not used as per instructions, or considered to be mistreated / incorrectly serviced or cared for.

Terms and conditions will be provided prior to opening an account and will be deemed to be accepted once the account has been opened. To view our full Terms & Conditions, Privacy Policy, Delivery and Returns policies please visit our website at www.premiumplusuk.com or contact us by phone or email. If you no longer wish to receive this mail, please call us on 0800 009 88 22 or email us at sales@premiumplusuk.com.