



All major credit cards accepted
minimum credit / debit card payment £20.00

EQUIPMENT
SPRING
2024

MY ACCOUNT REF...

FREE DELIVERY FOR ORDERS OVER £50

OTHERWISE £5.95 Royal Mail or £7.95 COURIER CHARGES APPLY FOR
MAINLAND DELIVERY. CHARGES FOR OTHER ZONES APPLY PLEASE SEE WEBSITE FOR DETAILS.



C01-M / C02-M LED CURING LIGHTS MINI (with USB charger)

- 360° Rotatable tips
- Automatic compensation circuit for constant power output
- Fully covered membrane panel for easy cleaning and infection control
- Light weight: approx. 85 gms
- Dual modes: FULL / SOFT
- 12 Operation times
- Fully charged battery provides over 100 x 10 second curing cycles

C01-M / C02-M SPECIFICATIONS

C01-M / C02-M SPECIFICATIONS		
Model	C01-M (F.O. Light Guide)	C02-M (Direct Light Source)
LIGHT TIP	8 mm (dia.)	11 mm (dia.)
LIGHT WAVELENGTH	440~480 nm	440~480 nm
MODE	FULL	1,200 mW/cm² for 5, 10, 15, 20, 25, 30 seconds±10%
	SOFT	1 st five seconds from 0-900 mW/cm² next 5, 10, 15, 20, 25 seconds 900 mW/cm²±10%
WEIGHT	86 gms	84 gms
LENGTH	230 mm	220 mm

C01-M / C02-M CURING LIGHT DEPTH OF CURE

MODEL MODE	C01-M (F.O. Light Guide) Curing Time	Depth Measurements	ISO 4049 Depth Measurements (-50%)	C02-M (Direct Light Source) Curing Time	Depth Measurements	ISO 4049 Depth Measurements (-50%)
FULL	10 seconds	4.3 mm	2.15 mm	10 seconds	5.1 mm	2.55 mm
SOFT	15 seconds	4.6 mm	2.30 mm	15 seconds	4.8 mm	2.40 mm

REMARKS: Above data is based on test results using an A2 shade composite. The light tip was placed above and pointed perpendicular to the composite. Tests were done as per ISO 4049 Standard. The samples were measured and the data was divided by two (50% of the total composite depth cured). ISO 4049 Standard requires that the results for class II restorative materials should be at least 1.5 mm for non-opaque shades and 1.0 mm for opaque shades. All resins and composites have different curing times. It is recommended that you should test your resins and composites performance to determine the curing times required.



C01-M Curing Light (F.O. Light Guide) £99.95
C02-M Curing Light (Direct Light Head) £125.00
C01-M F.O. Light Guide 8 mm £44.95
C02-M Direct Light Head 11 mm £64.95
C01-M/C02-M Replacement Battery £39.95
228 Light Sleeves Mini 500 pcs/box £24.95
USB Main Plug Charger £5.95

24 MONTH WARRANTY



063 Light Protective
Hand Shield
£21.95

C01-M/C02-M
For every
Curing Light purchased
get
one 063 Hand Shield
FREE



C01 LED CURING LIGHTS with fibre optic light guides

AUTOCURABLE
FIBRE OPTIC
LIGHT GUIDE
CAN BE
ROTATED 360°

ON/OFF
SWITCH
DISPLAY
SCREEN
TIME
SWITCH
MODE
INDICATORS
MODE
SWITCH

FULLY COVERED
MEMBRANE PANEL
FOR EASY CLEANING
AND INFECTION
CONTROL

A FULL CHARGE
OF BATTERY
CAN BE USED
MORE THAN
100 TIMES WHEN
SET AT 10 SECOND
TIME MODE

SIZE:
L265 x Dia.27 (mm)

REPLACEABLE
BATTERY
OPENING

C01 SPECIFICATIONS		
Model	C01-C (classic)	C01-D (dual range)
F.O. LIGHT GUIDE	8 mm (dia.)	11 mm (dia.)
LIGHT WAVELENGTH	440~480 nm	390~430 nm 440~480 nm
APPLICATION	General	General / Ortho
MODE	TACK	N/A
	TURBO	1,500 mW/cm ² for 5 seconds ±10%
	3' + 3'	2,000 mW/cm ² for 3 + 3 seconds ±10% (with 1 second blink in between)
	6' + 6'	1,500 mW/cm ² for 6 + 6 seconds ±10% (with 1 second blink in between)
	FULL	1,200 mW/cm ² for 5, 10, 15, 20 seconds ±10%
	RAMP	1 st five seconds from 0-1,200 mW/cm ² next 5, 10, 15, 20 seconds 1,200 mW/cm ² ±10%
	SOFT CURE	1 st five seconds from 0-900 mW/cm ² next 5, 10, 15, 20, 25 seconds 900 mW/cm ² ±10%
WEIGHT	205 gms	200 gms
LENGTH	260 mm	265 mm

CURING LIGHT MODE APPLICATIONS	
TACK	Tack cure, a very short initial curing for temporary processing before final cure. For example, veneer bonding or temporary cement for in-position and easy removal of excess material.
TURBO	Super fast curing for resin and composite under 2 mm thickness. Also recommended for ceramic brackets, veneer bonding etc.
3' + 3'	3 Seconds Mesial + 3 Seconds Distal for metal brackets resin bonding. (with 1 second blink in between)
6' + 6'	6 Seconds Mesial + 6 Seconds Distal for metal brackets with bonding resin requiring more curing time, and buccal tubes bonding. (with 1 second blink in between)
FULL	For general applications.
RAMP	With first 0-5 seconds ramping for general application.
SOFT CURE	With first 0-5 seconds ramping for more gentle processing, designed for the patients sensitive to the heat.

C01-C / C01-D CURING LIGHT DEPTH OF CURE						
MODEL	C01-C (classic) Curing Time	Depth Measurements	ISO 4049 Depth Measurements (-50%)	C01-D (dual range) Curing Time	Depth Measurements	ISO 4049 Depth Measurements (-50%)
TURBO	5 seconds	4.2 mm	2.10 mm	4 seconds	4.3 mm	2.15 mm
FULL	10 seconds	4.3 mm	2.15 mm	10 seconds	4.4 mm	2.20 mm
RAMP	10 seconds	4.1 mm	2.05 mm	10 seconds	4.2 mm	2.10 mm
SOFT CURE	15 seconds	4.6 mm	2.30 mm	15 seconds	4.6 mm	2.30 mm


REMARKS:

Above data is based on test results using an A2 shade composite. The light tip was placed above and pointed perpendicular to the composite. Tests were done as per ISO 4049 Standard. The samples were measured and the data was divided by two (50% of the total composite depth cured). ISO 4049 Standard requires that the results for class II restorative materials should be at least 1.5 mm for non-opaque shades and 1.0 mm for opaque shades. All resins and composites have different curing times. It is recommended that you should test your resins and composites performance to determine curing times required.

10 colours available:



C01 Complete Set
with Built-In
Light Intensity
Indicator

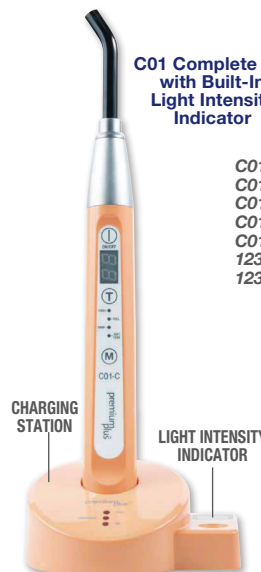


063
Protective Hand
Light Shield
£21.95

C01-C Curing Light (Classic) with 8 mm Light Guide £195.00
C01-D Curing Light (Dual Range) with 11 mm Light Guide £245.00
C01-C-1 8 mm Fibre Optic Light Guide £44.95
C01-S/D-1 11 mm Fibre Optic Light Guide £99.95
C01/2-1 Replacement Battery £49.95
123S Light Sleeves Small (for C01-C) 500 pcs/box £24.95
123L Light Sleeves Large (for C01-S/C01-D) 500 pcs/box £29.95

24 MONTH
WARRANTY

For every
C01 Curing Light
purchased (any model)
get
one 063 Hand Shield
FREE

C02 LED CURING LIGHTS 90° right angle direct light source head

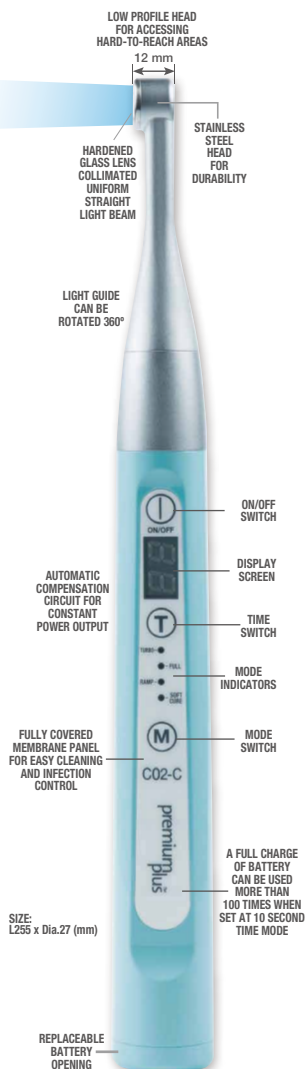

C02 SPECIFICATIONS			
Model		C02-C (classic)	C02-D (dual range)
DIRECT LIGHT HEAD		10 mm (dia.)	
LIGHT WAVELENGTH		440~480 nm	390~430 nm 440~480 nm
APPLICATION		General	General / Ortho
MODE	TACK	N/A	900 mW/cm ² for 1 second±10%
	TURBO	1,500 mW/cm ² for 5 seconds ±10%	2,000 mW/cm ² for 4 seconds±10%
	3' + 3'	N/A	2,500 mW/cm ² for 3 + 3 seconds±10% (with 1 second blink in between)
	6' + 6'	N/A	1,500 mW/cm ² for 6 + 6 seconds±10% (with 1 second blink in between)
	FULL	1,200 mW/cm ² for 5, 10, 15, 20 seconds±10%	
	RAMP	1 st five seconds from 0-1,200 mW/cm ² next 5, 10, 15, 20 seconds 1,200 mW/cm ² ±10%	
SOFT CURE		1 st five seconds from 0-900 mW/cm ² next 5, 10, 15, 20, 25 seconds 900 mW/cm ² ±10%	
WEIGHT		185 gms	185 gms
LENGTH		255 mm	255 mm

CURING LIGHT MODE APPLICATIONS	
TACK	Tack cure, a very short initial curing for temporary processing before final cure. For example, veneer bonding or temporary cement for in-position and easy removal of excess material.
TURBO	Super fast curing for resin and composite under 2 mm thickness. Also recommended for ceramic brackets, veneer bonding etc.
3' + 3'	3 Seconds Mesial + 3 Seconds Distal for metal brackets resin bonding. (with 1 second blink in between)
6' + 6'	6 Seconds Mesial + 6 Seconds Distal for metal brackets with bonding resin requiring more curing time, and buccal tubes bonding. (with 1 second blink in between)
FULL	For general applications.
RAMP	With first 0-5 seconds ramping for general application.
SOFT CURE	With first 0-5 seconds ramping for more gentle processing, designed for the patients sensitive to the heat.

C02-C / C02-D CURING LIGHT DEPTH OF CURE						
MODEL	C02-C (classic) Curing Time	Depth Measurements	ISO 4049 Depth Measurements (-50%)	C02-D (dual range) Curing Time	Depth Measurements	ISO 4049 Depth Measurements (-50%)
TURBO	5 seconds	4.4 mm	2.20 mm	3 seconds	4.5 mm	2.25 mm
FULL	10 seconds	5.1 mm	2.55 mm	10 seconds	5.2 mm	2.60 mm
RAMP	10 seconds	4.8 mm	2.40 mm	10 seconds	4.9 mm	2.45 mm
SOFT CURE	15 seconds	5.0 mm	2.50 mm	15 seconds	5.1 mm	2.55 mm


REMARKS:

Above data is based on test results using an A2 shade composite. The light tip was placed above and pointed perpendicular to the composite. Tests were done as per ISO 4049 Standard. The samples were measured and the data was divided by two (50% of the total composite depth cured). ISO 4049 Standard requires that the results for class II restorative materials should be at least 1.5 mm for non-opaque shades and 1.0 mm for opaque shades. All resins and composites have different curing times. It is recommended that you should test your resins and composites performance to determine curing times required.

10 colours available:



C02 Complete Set with Built-In Light Intensity Indicator



C02-C (Classic) Curing Light with 10 mm Light Head £225.00
C02-D (Dual Range) Curing Light with 10 mm Light Head £275.00
C02-C-1 (Classic) Direct Light Source Head £64.95
C02-S-1 (Super Power) Direct Light Source Head £99.95
C02-D-1 (Dual Range) Direct Light Source Head £99.95
C01/2-1 Replacement Battery £49.95
125 Light Sleeves (for C02-C/S/D) 500 pcs/box £24.95
C02-3N Heat Protect Rings, 6 pcs/pack £24.95



24 MONTH WARRANTY

For every C02 Curing Light purchased (any model) get one 063 Hand Shield FREE



L10-1
Straight Handpiece
1:1 Standard
£74.95



L20-1L
Latch CA Handpiece
1:1 Standard
£74.95

LOW SPEED HANDPIECES AND AIR MOTOR



L30 Air Motor (2 or 4 holes) 20,000 r.p.m. ... £84.95

**12 MONTH
WARRANTY**

**Buy 2
get
1 FREE**
(same item)



Colour:
White

SPECIAL

MaxPiezo 6	£155.00
MaxPiezo 6+	£185.00
MaxPiezo DS6	£155.00
MaxPiezo DS6+	£195.00

REFINE Non-LED / LED TABLE TOP SCALERS

- Automatic frequency tracking, real-time feedback
- Power and water controlled by touch panel, easy to clean for infection control
- Detachable handpiece
- Frequency: 28 kHz \pm 3 kHz
- Complete with 6 tips
- Size: W155mm x D168mm x H80mm
- Weight: 0.6 kg (unit only)




ONE YEAR WARRANTY
(except scaler tips)

MaxPiezo 6 (EMS Type) Non-LED Scaler Set	£235.00
MaxPiezo 6+ (EMS Type) LED Scaler Set	£285.00
MaxPiezo DS6 (SATELEC Type) Non-LED Scaler Set ...	£245.00
MaxPiezo DS6+ (SATELEC Type) LED Scaler Set	£295.00

REFINE Non-LED / LED PORTABLE SCALERS

- Automatic frequency tracking, real-time feedback
- Extra large, capacity 600 ml water tank for water, chlorhexidine, hydrogen peroxide, sodium hypochlorite etc...
- Power and water controlled by touch panel, easy to clean for infection control
- Detachable handpiece
- Frequency: 28 kHz \pm 3 kHz
- Complete with 8 tips
- Size: W180mm x D180mm x H150mm
- Weight: 1.6 kg (unit only)

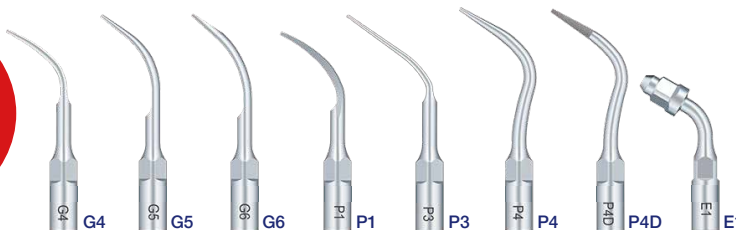

ONE YEAR WARRANTY
(except scaler tips)



Colour:
White

SPECIAL

MaxPiezo 7	£245.00
MaxPiezo 7+	£295.00
MaxPiezo DS7	£265.00
MaxPiezo DS7+	£315.00

MaxPiezo 7 (EMS Type) Portable Non-LED Scaler Set	£495.00
MaxPiezo 7+ (EMS Type) Portable LED Scaler Set	£545.00
MaxPiezo DS7 (SATELEC Type) Portable Non-LED Scaler Set ...	£545.00
MaxPiezo DS7+ (SATELEC Type) Portable LED Scaler Set	£595.00

REFINE Non-LED / LED BUILT-IN SCALERS

- Automatic frequency tracking, real-time feedback
- Detachable handpiece
- Frequency: 28 KHz \pm 3 KHz
- Complete with 6 tips



SPECIAL

N3000	£155.00
N3000L	£165.00
V3000	£165.00
V3000L	£175.00



ONE YEAR WARRANTY
(except scaler tips)

N3000 (EMS Type) Built-In Non-LED Scaler Set	£235.00
N3000L (EMS Type) Built-In LED Scaler Set	£285.00
V3000 (SATELEC Type) Built-In Non-LED Scaler Set ...	£245.00
V3000L (SATELEC Type) Built-In LED Scaler Set	£295.00



**C3RK
MOBILE
CART**

- Attractive design and durable construction
- 4 outlet sockets for use with electrical devices
- 3 shelf trolley
- Round shelves for safety and hygiene
- Table size: W40 cm x D30 cm
- Over all height: 78 cm
- Height between shelves: 27.5 cm

C3RK Mobile Cart £235.00

1. EMS is a registered trademark of Electro Medical System S.A. Switzerland
2. SATELEC is a registered trademark of Satelec/Acteon Group France

REFINE AUTOCLAVABLE SCALER HANDPIECES



HP-3H Non-LED Scaler Handpiece (EMS¹ Type) £99.95



HS-7H Non-LED Scaler Handpiece (SATELEC², NSK³ Type) £109.95



HP-5L LED Scaler Handpiece (EMS¹ Type) £109.95



HS-7L LED Scaler Handpiece (SATELEC², NSK³ Type) £119.95

ONE YEAR WARRANTY

**Buy 2
get
1 FREE**
(same item)

REFINE AUTOCLAVABLE SCALER TORQUE WRENCHES



TW-1L
For REFINE, EMS¹,
SATELEC², NSK³,
KAVO PiezoLED⁵
Type scaler
each
£10.95



TS-1L
for SIRONA⁴
Type scaler
each
£12.95



TK-1L
for KAVO
SONICflex⁵,
SONOsoft⁵,
Type scaler
each
£12.95



3H Non-LED (EMS¹ Type)
Handpiece Hose ... £39.95



7H Non-LED (SATELEC² Type)
Handpiece Hose ... £39.95




5L LED (EMS¹ Type)
Handpiece Hose ... £49.95



7L LED (SATELEC² Type)
Handpiece Hose ... £49.95

REFINE SCALER HANDPIECE HOSES

REFINE ENDO WRENCH



TW-A

- Multi function wrench for both endo chuck & bur
- Autoclavable up to 134°C

each
£11.95



REFINE SOLENOID VALVE

each
£32.95



REFINE FOOT SWITCH

each
£32.95



REFINE POWER SUPPLY

each
£54.95



REFINE AUTOCLAVABLE SCALER TIP HOLDER

each
£13.95



E04 ULTRASONIC FILES NiTi alloy

- For use with ultrasonic scaler
- Excellent tenacity
- Length: 33 mm

E04 ULTRASONIC FILES NiTi alloy	
#15 ○	#30 ●
#20 ●	#35 ●
#25 ●	#40 ●


E04 Ultrasonic Files
Single Size
6 pcs/pack
£5.95

1. EMS is a registered trademark of Electro Medical System S.A. Switzerland
2. SATELEC is a registered trademark of Satelec/Acteon Group France
3. NSK is a registered trademark of Nakanishi Inc. Japan
4. SIRONA is a registered trademark of Sirona Dental System
5. KAVO, SONICflex, SONOsoft, PiezoLED are registered trademarks of Kavo Dental GmbH Germany


REFINE SCALER TIPS STAINLESS STEEL

FOR EMS¹, SATELEC², NSK³ and SIRONA⁴ REFINE Type Scalers


SCALING




G1 (EMS¹ Type)
GD1 (SATELEC², NSK³ Type)
GS1 (SIRONA⁴ Type)
Supragingival deposits
in all quadrants




G2 (EMS¹ Type)
GD2 (SATELEC², NSK³ Type)
GS2 (SIRONA⁴ Type)
Heavy supragingival
deposits on anterior teeth




G3 (EMS¹ Type)
GD3 (SATELEC², NSK³ Type)
GS3 (SIRONA⁴ Type)
Supragingival deposits
in all quadrants, including
the interproximal and
sulcus areas



G4 (EMS¹ Type)
GD4 (SATELEC², NSK³ Type)
GS4 (SIRONA⁴ Type)
Supragingival and
interproximal deposits




G5 (EMS¹ Type)
GD5 (SATELEC², NSK³ Type)
GS5 (SIRONA⁴ Type)
Supragingival deposits
in all quadrants




G6 (EMS¹ Type)
GD6 (SATELEC², NSK³ Type)
GS6 (SIRONA⁴ Type)
Voluminous supragingival
deposits


ENDO




E1 (EMS¹ Type)
ED1 (SATELEC², NSK³ Type)
ES1 (SIRONA⁴ Type)
120°file holder for anterior
root canal irrigation




E2 (EMS¹ Type)
ED2 (SATELEC², NSK³ Type)
ES2 (SIRONA⁴ Type)
95°file holder for molar teeth
root canal irrigation




E3 (EMS¹ Type)
ED3 (SATELEC², NSK³ Type)
ES3 (SIRONA⁴ Type)
Gutta-percha melting




E3D (EMS¹ Type)
ED3D (SATELEC², NSK³ Type)
ES3D (SIRONA⁴ Type)
Diamond coated instrument
for root canal enlarging




P4D (EMS¹ Type)
PD4D (SATELEC², NSK³ Type)
PS4D (SIRONA⁴ Type)
Diamond coated instrument
for root canal enlarging



E4 (EMS¹ Type)
ED4 (SATELEC², NSK³ Type)
ES4 (SIRONA⁴ Type)
Removing root filling
obstructions during
root canal retreatment




E4D (EMS¹ Type)
ED4D (SATELEC², NSK³ Type)
ES4D (SIRONA⁴ Type)
Removing calcification and
filling material during
root canal retreatment




E5 (EMS¹ Type)
ED5 (SATELEC², NSK³ Type)
ES5 (SIRONA⁴ Type)
Removing root filling
obstructions during
root canal retreatment



E5D (EMS¹ Type)
ED5D (SATELEC², NSK³ Type)
ES5D (SIRONA⁴ Type)
Removing calcification and
filling material during
root canal retreatment



E14 (EMS¹ Type)
ED14 (SATELEC², NSK³ Type)
ES14 (SIRONA⁴ Type)
Removing root filling
obstructions during
root canal retreatments



E15 (EMS¹ Type)
ED15 (SATELEC², NSK³ Type)
ES15 (SIRONA⁴ Type)
Removing root filling
obstructions during
root canal retreatments




1. EMS is a registered trademark of Electro Medical System S.A. Switzerland
2. SATELEC is a registered trademark of Satelec/Acteon Group France
3. NSK is a registered trademark of Nakanishi Inc. Japan
4. SIRONA is a registered trademark of Sirona Dental System


REFINE SCALER TIPS STAINLESS STEEL

FOR EMS¹, SATELEC², NSK³ and SIRONA⁴ Type Scalers


P1 (EMS¹ Type)
 PD1 (SATELEC², NSK³ Type)
 PS1 (SIRONA⁴ Type)
 Shallow pocket subgingival deposits



P3 (EMS¹ Type)
 PD3 (SATELEC², NSK³ Type)
 PS3 (SIRONA⁴ Type)
 Deep pocket subgingival deposits




P4 (EMS¹ Type)
 PD4 (SATELEC², NSK³ Type)
 PS4 (SIRONA⁴ Type)
 Shallow pocket subgingival deposits




P3D (EMS¹ Type)
 PD3D (SATELEC², NSK³ Type)
 PS3D (SIRONA⁴ Type)
 Diamond coated instrument for root planning after periodontal flap surgery


PERIO




P2L (EMS¹ Type)
 PD2L (SATELEC², NSK³ Type)
 Left angle instrument to remove calculus from very narrow inter-root space and furcation



P2R (EMS¹ Type)
 PD2R (SATELEC², NSK³ Type)
 Right angle instrument to remove calculus from very narrow inter-root space and furcation



P2LD (EMS¹ Type)
 PD2LD (SATELEC², NSK³ Type)
 Removal of calculus from narrow inter-root spaces (diamond-coated)



P2RD (EMS¹ Type)
 PD2RD (SATELEC², NSK³ Type)
 Diamond coated instrument for root planning


Buy 2
 get
 1 FREE
 (same item)

FOR AMDENT⁶ Type Scalers

A1 (AMDENT⁶ Type)
 Supragingival scaling
 (#37)




A2 (AMDENT⁶ Type)
 Supragingival scaling
 (#39)

FOR KAVO SONICflex⁵ Type Scalers


GK1 (KAVO⁵ Type)
 Supragingival deposits in all quadrants




GK2 (KAVO⁵ Type)
 Supragingival heavy calculus and plaque




GK3 (KAVO⁵ Type)
 Supragingival interdental calculus and calculus at the neck of the tooth




GK4 (KAVO⁵ Type)
 Supragingival deposits, including the interproximal and sulcus areas




GK5 (KAVO⁵ Type)
 Subgingival calculus



GK6 (KAVO⁵ Type)
 Left angle instrument for removing subgingival calculus




GK7 (KAVO⁵ Type)
 Right angle instrument for removing subgingival calculus

FOR KAVO SONOsoft⁵ Type Scalers


GC1 (KAVO⁵ Type)
 Supragingival deposits in all quadrants




GC2 (KAVO⁵ Type)
 Supragingival interdental calculus and calculus at the neck of the tooth




PC1 (KAVO⁵ Type)
 Subgingival calculus, including the interproximal and sulcus areas

KAVO PiezoLED⁵ Type Scalers

201 (KAVO⁵ Type)
 Supragingival and interproximal deposits



202 (KAVO⁵ Type)
 Supragingival deposits in all quadrants, including the interproximal and sulcus areas



203 (KAVO⁵ Type)
 Deep pocket subgingival deposits

1. EMS is a registered trademark of Electro Medical System S.A. Switzerland
2. SATELEC is a registered trademark of Satelec/Acteon Group France
3. NSK is a registered trademark of Nakanishi Inc. Japan
4. SIRONA is a registered trademark of Sirona Dental System
5. KAVO, SONICflex, SONOsoft, PiezoLED are registered trademarks of Kavo Dental GmbH Germany
6. AMDENT is a registered trademark of Amdent AB Sweden

REFINE Non-LED / LED AUTOCLAVABLE SCALER HANDPIECE KITS



- Complete with:-
- 1x Handpiece 3H / 5L / 7H / 7L
- 3x Perio scaler tip P1 / PD1
- 1x Torque wrench TW-1L
- 1x Scaler tip holder No.1
- 1x Sterilization box

3H Non-LED Handpiece Kit (EMS Type)	£265.00
7H Non-LED Handpiece Kit (SATELEC Type)	£315.00
5L LED Handpiece Kit (EMS Type)	£295.00
7L LED Handpiece Kit (SATELEC Type)	£295.00

(for handpiece connections, please refer to page Q5)



ONE YEAR WARRANTY
(except scaler tips)

SPECIAL

3H Kit	£99.95
7H Kit	£109.95
5L(LED) Kit	£109.95
7L(LED) Kit	£109.95

REFINE Non-LED / LED PORTABLE SCALERS




Colour:
White

- Automatic frequency tracking, real-time feedback
- Extra large, capacity 600 ml water tank for water, chlorhexidine, hydrogen peroxide, sodium hypochlorite etc...
- Power and water controlled by touch panel, easy to clean for infection control
- Detachable handpiece
- Frequency: 28 kHz \pm 3 kHz
- Complete with 8 tips
- Size: W180mm x D180mm x H150mm
- Weight: 1.6 kg (unit only)

SPECIAL

MaxPiezo 7	£245.00
MaxPiezo 7+	£295.00
MaxPiezo DS7	£265.00
MaxPiezo DS7+	£315.00

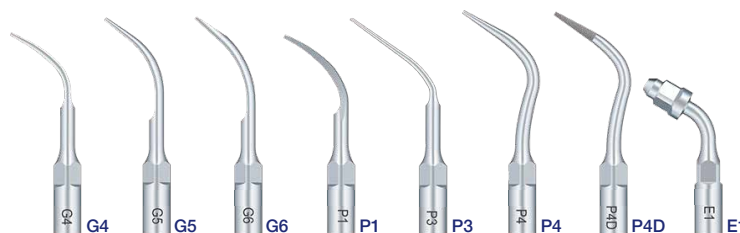

ONE YEAR WARRANTY (except scaler tips)

MaxPiezo 7 (EMS Type) Portable Non-LED Scaler Set	£495.00
MaxPiezo 7+ (EMS Type) Portable LED Scaler Set	£545.00
MaxPiezo DS7 (SATELEC Type) Portable Non-LED Scaler Set ...	£545.00
MaxPiezo DS7+ (SATELEC Type) Portable LED Scaler Set	£595.00



Colour:
White

SPECIAL

MaxPiezo 6	£155.00
MaxPiezo 6+	£185.00
MaxPiezo DS6	£155.00
MaxPiezo DS6+	£195.00

REFINE Non-LED / LED TABLE TOP SCALERS

- Automatic frequency tracking, real-time feedback
- Power and water controlled by touch panel, easy to clean for infection control
- Detachable handpiece
- Frequency: 28 kHz \pm 3 kHz
- Complete with 6 tips
- Size: W155mm x D168mm x H80mm
- Weight: 0.6 kg (unit only)



ONE YEAR WARRANTY
(except scaler tips)

MaxPiezo 6 (EMS Type) Non-LED Scaler Set	£235.00
MaxPiezo 6+ (EMS Type) LED Scaler Set	£285.00
MaxPiezo DS6 (SATELEC Type) Non-LED Scaler Set ...	£245.00
MaxPiezo DS6+ (SATELEC Type) LED Scaler Set	£295.00



SPECIAL

N3000	£155.00
N3000L	£165.00
V3000	£165.00
V3000L	£175.00

REFINE Non-LED / LED BUILT-IN SCALERS

- Automatic frequency tracking, real-time feedback
- Detachable handpiece
- Frequency: 28 KHz \pm 3 KHz
- Complete with 6 tips



ONE YEAR WARRANTY
(except scaler tips)

N3000 (EMS Type) Built-In Non-LED Scaler Set	£235.00
N3000L (EMS Type) Built-In LED Scaler Set	£285.00
V3000 (SATELEC Type) Built-In Non-LED Scaler Set ...	£245.00
V3000L (SATELEC Type) Built-In LED Scaler Set	£295.00

1. EMS is a registered trademark of Electro Medical System S.A. Switzerland
2. SATELEC is a registered trademark of Satelec/Acteon Group France

Terms and Conditions

All prices shown are VAT exclusive. All prices, including delivery, special deals and products are subject to change without prior notice. Premium Plus reserves the right to correct errors and omissions in any of our advertising (paper or electronic). Catalogues (prices and specials) will be deemed to be superseded on the issue of the most recent catalogue/ flyer. Goods will not be accepted for return without prior authorisation. Customers must notify Premium Plus of a return within 7 days from the date of delivery. Returned goods received after this time or without prior authorisation may not be accepted. Costs incurred for the return of goods will be at the Customers expense, except in cases of incorrectly supplied or faulty goods. Returned goods must be in a re-saleable condition (inclusive of all original packaging, unopened and unused). Credit accounts are due strictly 30 days from the invoice date. In the event that the Customer fails to pay any monies by the due date, interest may be charged at the rate of 2% interest per month. The Customer is liable for all costs incurred by Premium Plus in the recovery of any debt, including legal fees and any other associated costs. Premium Plus retains ownership of the goods until they are paid in full. Premium Plus shall endeavour to dispatch all orders received before 3pm for either next working day delivery or 1st Class Post dependant on order weight and value. However, delivery dates and times specified are approximate only. Premium Plus cannot guarantee delivery times and will not be held liable or responsible if any timeframes cannot be met. Substitute goods may be supplied when those ordered are unavailable. Equipment warranties are as stated in catalogues/flyers or instructions and are considered void if not used as per instructions, or considered to be mistreated / incorrectly serviced or cared for.

Terms and conditions will be provided prior to opening an account and will be deemed to be accepted once the account has been opened. To view our full Terms & Conditions, Privacy Policy, Delivery and Returns policies please visit our website at www.premiumplusuk.com or contact us by phone or email. If you no longer wish to receive this mail, please call us on 0800 009 88 22 or email us at sales@premiumplusuk.com.