

premium plusuk



All major credit cards accepted
minimum credit / debit card payment £20.00

EQUIPMENT
AUTUMN
2025

freephone : 0800 009 8822
email : sales@premiumplusuk.com

shop on our website :
www.premiumplusuk.com

FREE DELIVERY FOR ORDERS OVER £50

OTHERWISE £5.95 Royal Mail or £7.95 COURIER CHARGES APPLY FOR
MAINLAND DELIVERY. CHARGES FOR OTHER ZONES APPLY PLEASE SEE WEBSITE FOR DETAILS.

MY ACCOUNT REF...



For every
C01/C02 Curing
Light purchased get
(any model)
**one 063 Hand Shield
FREE**

C01-X LED CURING LIGHT with fibre optic light guide C02-X LED CURING LIGHT 90° RA direct light source head

SPECIFICATIONS		
MODEL	C01-X	C02-X
LIGHT TIP	F.O. LIGHT GUIDE 11 mm (dia.)	DIRECT LIGHT SOURCE 10 mm (dia.)
LIGHT WAVELENGTH	PURPLE RANGE: EFFECTIVE LOWER WAVELENGTH BAND 390 nm – 430 nm BLUE RANGE: EFFECTIVE UPPER WAVELENGTH BAND 440 nm – 480 nm	
APPLICATION	General / Ortho	
MODE	TURBO	2,000 mW/cm ² for 4 seconds ±10% 2,500 mW/cm ² for 3 seconds ±10%
	FULL	1,200 mW/cm ² for 10 seconds ±10%
	RAMP	1st five seconds from 0–1,200 mW/cm ² next 5 to 20 seconds 1,200 mW/cm ²
	SOFT CURE	1st five seconds from 0–900 mW/cm ² next 5 to 20 seconds 900 mW/cm ²
WEIGHT	175 gms	140 gms
LENGTH	265 mm	255 mm

CURING LIGHT MODE APPLICATIONS	
TURBO	Super fast curing for resin and composite under 2 mm thickness. Also recommended for ceramic brackets, veneer bonding etc.
FULL	For general applications.
RAMP	With first 0–5 seconds ramping for general application.
SOFT CURE	With first 0–5 seconds ramping for more gentle processing, designed for the patients sensitive to the heat.

7 colours available:



C01-X Complete Set
with Built-In
Light Intensity
Indicator

**24 MONTH
WARRANTY**

C02-X Complete Set
with Built-In
Light Intensity
Indicator

CHARGING
STATION

LIGHT
INTENSITY
INDICATOR

CHARGING
STATION

LIGHT
INTENSITY
INDICATOR

C01-X Curing Light with 11 mm Light Guide	£185.00
C01-X-1 11 mm Fibre Optic Light Guide	£99.95
C01-2 Protective Light Shield	£13.95
CX-LH Replacement Battery	£49.95
123M Disposable Curing Light Sleeves Medium 500 pcs/box	£29.95
C02-X Curing Light with 10 mm Direct Light Source Head	£215.00
C02-X-1 10 mm Direct Light Source Head	£99.95
C02-2 Protective Light Shield	£13.95
C02-3 Heat Protection Rings (6pcs)	£24.95
CX-LH Replacement Battery	£99.95
125 Disposable Curing Light Sleeves 500 pcs/box	£24.95

High Speed Handpieces, Endomotor and Apex Locator

BEING LOTUS HIGH SPEED TURBINE STANDARD CONNECTION

BEING
Medical Equipment

6 MONTH WARRANTY



302P-M4 Turbine **Push Button** 4 Hole Midwest **£99.95**

- Speed: 300,000 – 380,000 rpm
- Anti retraction
- Ceramic bearings
- Quiet operation noise level, less than 70dB
- Triple water spray
- Suitable for autoclave and thermo disinfectors
- Standard connection Midwest 4 holes

BEING LOTUS HIGH SPEED TURBINE QUICK DISCONNECT



302PQ-K **LED KAVO Type (without coupling)** **£119.95**
302PQ-N **LED NSK Type (without coupling)** **£119.95**

104K Quick Disconnect **Coupling** 4 Hole KAVO Type **£49.95**
104N Quick Disconnect **Coupling** 4 Hole NSK Type **£49.95**

NON LED QUICK COUPLING



- Speed: 300,000 – 380,000 rpm
- Anti retraction
- Ceramic bearings
- Quiet operation noise level, less than 60dB
- Triple water spray
- Suitable for autoclave and thermo disinfectors
- For use with NON-LED quick disconnect fitting

BEING LOTUS LED HIGH SPEED TURBINE QUICK DISCONNECT



302PBQ-K **LED KAVO Type (without coupling)** **£179.95**
302PBQ-N **LED NSK Type (without coupling)** **£179.95**

106KB **LED Quick Disconnect Coupling** 6 Hole KAVO Type ... **£59.95**
106NB **LED Quick Disconnect Coupling** 6 Hole NSK Type **£59.95**

LED QUICK COUPLING



- Speed: 300,000 – 380,000 rpm
- High torque head
- Anti retraction
- Ceramic bearings
- Quiet operation noise level, less than 60dB
- Triple water spray
- Suitable for autoclave and thermos disinfectors
- For use with LED quick disconnect fitting

E88 ENDOMOTOR WITH APEX LOCATOR INTEGRATION CAPABILITIES

- **5 reciprocation modes (M0)**
 - Forward Reciprocation-Four Modes Clockwise & Counterclockwise movement
 - Fwd 150° - Rev 30° | Fwd 180° - Rev 30° for continuous rotation files
 - Fwd 210° - Rev 30° | Fwd 250° - Rev 30° for continuous rotation files
 - Reverse Reciprocation-One Mode Counterclockwise & Clockwise movement
 - Fwd 30° - Rev 150° for reciprocating files
- **9 editable memory programs (M1 to M9)**
 - Forward or reverse direction rotation
 - Torque auto reverse
 - Editable speed/rpm setting
 - Editable torque settings
 - Maximum speed 1000 rpm
 - 360° clockwise rotational movement
- Digital OLED with ambidextrous display
- Low noise motor
- Torque calibration
- Volume adjustable

e88 kit contents: motor handpiece, contra angle head, insulating sleeve, handpiece stand, spray nozzle, USB cable, power adaptor

- e8801 endomotor contra angle head **£159.95**
- e8802 endomotor insulating sleeve **£19.95**
- e8803 endomotor USB connect function cable ... **£19.95**
- e8804 endomotor spray nozzle **£19.95**

12 MONTH WARRANTY (excluding spare parts)

e88 Endo Motor
each **£480.00**

SPECIAL
£345.95



E98 APEX LOCATOR WITH ENDOMOTOR INTEGRATION CAPABILITIES

- Large 9cm LCD display with visual display of file position
- Biomimetic-silica-wrapped file clip with large arc for easier file installation, can be autoclaved more than 1000 times
- Stainless steel lip hook
- Compact size & stable design
- Advanced multi-frequency technology with automatic calibration
- High precision in wet & dry canals
- Powerful 1500 mAh lithium-ion battery
- Volume adjustable
- Accessories autoclavable to 134°C
- Dimensions: 9.5 x 6.5 x 2.0cm

- e98 kit contents: apex locator, measuring wire, two file clips, two lip hooks, apex locator tester, power adaptor**
- e9801 apex locator measuring wire **£19.95**
 - e9802 apex locator 2x lip hook **£19.95**
 - e9803 apex locator 2x file clips **£19.95**
 - e9804 apex locator tester **£19.95**

E88 Endomotor integration with E98 Apex Locator

Integration of the 2 units allows the full range of functions of both devices to be used:

- In connect function e88 Endomotor mirrors e98 Apex Locator's screen



- Auto Start & Stop
- Apical Reverse
- Apical Slow Down



e-98 Apex Locator
each **£165.00**

12 MONTH WARRANTY (excluding spare parts)

BEING AIR MOTOR AND LOW SPEED HANDPIECES 'E' FITTING INTERNAL SPRAY 6 MONTH WARRANTY

BEING
Medical Equipment



INTERNAL SPRAY

202CAP Push Button CA 1:1 Standard £89.95



202CAP-R4 Push Button CA 4:1 Reduction £139.95



202SH Straight 1:1 Standard £89.95



202AM-M4 Air Motor 4 Holes 24,000 r.p.m. £99.95



FIBRE OPTIC INTERNAL SPRAY

202CAP-B Push Button CA F.O. 1:1 Standard £139.95



202CAP-R4-B Push Button CA 4:1 Reduction £189.95



202SH-B Straight F.O. 1:1 Standard £139.95



202AM-M4-B F.O. Air Motor 4 Holes 24,000 r.p.m. £149.95

LOW SPEED HANDPIECES AND AIR MOTOR 12 MONTH WARRANTY

premiumplus™




L20-1L Latch CA Handpiece 1:1 Standard £74.95



L10-1 Straight Handpiece 1:1 Standard £74.95



L30 Air Motor (4 holes) 20,000 r.p.m. £84.95



L10-4PY Propy Attachment 4:1 Reduction £99.95

Buy 2
get
1 FREE
(same item)

JINME HIGH / LOW SPEED HANDPIECES 6 MONTH WARRANTY

jinme



LED STANDARD HEAD
1:1 Standard Internal Water Spray

DW2621
LED Push Button CA Handpiece
max speed < 40,000 rpm
each £199.95



LED STANDARD HEAD
1:5 Speed Increasing Internal Water Spray

DW2619
LED Push Button CA Handpiece
max speed < 200,000 rpm
each £299.95



Non LED STANDARD HEAD
1:1 Standard Internal Water Spray

DW2628
Non LED Push Button CA Handpiece
max speed < 20,000 rpm
each £69.95



Triple Spray, Anti-Reverse Water System, max speed < 370,000 rpm

DW2599 Non LED Titanium High Speed Handpiece ... £109.95



Triple Spray, Anti-Reverse Water System, max speed < 380,000 rpm

DW2600N LED Titanium High Speed Handpiece NSK Type Fitting £199.95
DW2600K LED Titanium High Speed Handpiece KAVO Type Fitting .. £199.95

For each DW2600N / DW2600K purchased get
one NSK / KAVO Type coupling FREE

C03-C CARBOLITE LED CURING LIGHT



- **High Grade Aluminium Body**
Construction durability and provides unsurpassed heat dissipation
- **8 Modes**
Normal, High, Turbo, Ortho, Pulse, Ramp, Caries Detection, Soft
- **Caries Detection**
For detecting caries, calculus and cracked teeth
- **4 Micro Cure Lens**
A different micro cure lens to cover every need
- **Collimated Light Beam**
A 10 mm collimated light beam that produces a multi wave length 385 nm - 515 nm to cure most products on the market
- **Constant Circuit Intensity Output**
Automatic compensation circuit for constant power output
- **Charging base with built-in light intensity indicator**

C03C Carbolite Curing Light with built-in Light Indicator and 4 Micro Cure Lens £275.00
Replacement Cure Lens (A, B, C or D) £19.95 (each)
228 Light Sleeves Mini 500 pcs/box £24.95

12 MONTH WARRANTY

For every C03C Carbolite purchased get one 063 Hand Shield FREE



063 Protective Hand Light Shield £21.95



10 mm



SHORT BALL A

Microcure Ball Lens
Facilitates the building of convex proximal contacts. The imprint is easily filled with composite in a second step, push the Microcure Ball Lens against the interproximal wall of the band, do not submerge in composite.



LONG BALL B



C

Microcure Lens
It provides pinpoint curing of small composites and is helpful for tack curing veneers.



D

Endo Guide Lens
The mini light guide is suitable for curing apex position of the tooth and other limited areas.

C03-C CARBOLITE SPECIFICATIONS		
DIRECT LIGHT SOURCE	10 mm (dia.)	
LIGHT WAVELENGTH	385~515 nm	
WEIGHT	110 gms	
LENGTH	224 mm	
MODE	APPLICATION	SPECIFICATION
NORMAL	For general applications.	1,200 mW/cm ² for 5, 10, 15, 20 seconds ±10%
HIGH	For quick curing of resin and composites that are no more than 2 mm thick. Also recommended for ceramic brackets, bonding veneers etc.	2,000 mW/cm ² for 1, 3, 5 seconds ±10%
TURBO	For super fast curing of resin and composites that are no more than 2 mm thick. Also recommended for ceramic brackets, bonding veneers etc.	3,000 mW/cm ² for 1, 3 seconds ±10%
ORTHO	For orthodontic applications. 3 second mesial + 3 second distal for metal brackets resin bonding (with 1 sec blink in-between).	Ortho x 05 2,500 mW/ cm ² for 5 x 3 seconds with 1s interval ±10% Ortho x 10 2,500 mW/ cm ² for 10 x 3 seconds with 1s interval ±10%
PULSE	Pulse effectively reduces heat generation, efficiently dissipates heat shrinkage and ensure comfort during treatment.	1,200 mW/cm ² for 5, 10, 15, 20 seconds with 0.2 seconds off ±10%
RAMP	First 0-5 seconds are ramped for general applications	1st five seconds from 0-1,200 mW/cm ² next 5, 10, 15 seconds 1,200 mW/cm ²
CHECK	For detecting caries, calculus and cracked teeth.	Purple light for 30 or 60 seconds
SOFT	First 0-5 seconds are ramped for more gentle processing, designed for patients sensitive to heat.	900 mW/cm ² for 5, 10, 15, 20 seconds ±10%

C03-B BASIC CURE LED CURING LIGHT



- **Unbeatable Value**
High-performance curing light with advanced features at a budget-friendly price
- **Four Versatile Modes**
Normal, High, Ortho, Ramp
- **Dual Wavelength Technology**
Effectively cures all composite materials on the market
- **Compact Low-Profile Head**
Easily reaches hard-to-access areas, ensuring precision and ease of use

C03-B set contents:
• curing light handpiece
• 10mm direct light source head
• charging base,
• protective light shield
• 100pcs barrier sleeves
• power adaptor

C03-B Basic Cure Curing Light £119.00
C03-B-1 10mm Direct Light Source Head £64.95
C03-B-3 Protective Light Shield £13.95
C03-B-3 Power Adaptor £29.95
125SS Barrier Sleeves Small Short (500 pcs/box) £24.95

12 MONTH WARRANTY

C03-B BASIC CURE SPECIFICATIONS		
DIRECT LIGHT SOURCE	10 mm (dia.)	
LIGHT WAVELENGTH	385~515 nm	
WEIGHT	85 gms	
LENGTH	230 mm	
MODE	APPLICATION	SPECIFICATION
NORMAL	For general applications.	1,200 mW/cm ² for 5, 10, 15, 20 seconds ±10%
HIGH	For quick curing of resin and composites that are no more than 2 mm thick. Also recommended for ceramic brackets, bonding veneers etc.	2,500 mW/cm ² for 1, 3, 5 seconds ±10%
ORTHO	For orthodontic applications. 3 second mesial + 3 second distal for metal brackets resin bonding (with 1 sec blink in-between).	Ortho x 05 2,500 mW/ cm ² for 5 x 3 seconds with 1s interval ±10% Ortho x 10 2,500 mW/ cm ² for 10 x 3 seconds with 1s interval ±10%
RAMP	First 0-5 seconds are ramped for general applications	1st five seconds from 0-1,200 mW/cm ² next 5, 10, 15 seconds 1,200 mW/cm ²

C01 LED CURING LIGHTS with fibre optic light guides

AUTOCURABLE
FIBRE OPTIC
LIGHT GUIDE
CAN BE
ROTATED 360°

ON/OFF
SWITCH
DISPLAY
SCREEN
TIME
SWITCH
MODE
INDICATORS
MODE
SWITCH
FULLY COVERED
MEMBRANE PANEL
FOR EASY CLEANING
AND INFECTION
CONTROL
A FULL CHARGE
OF BATTERY
CAN BE USED
MORE THAN
100 TIMES WHEN
SET AT 10 SECOND
TIME MODE
SIZE:
L265 x Dia.27 (mm)

REPLACEABLE
BATTERY
OPENING

10 colours available:



C01 SPECIFICATIONS		
Model	C01-C (classic)	C01-D (dual range)
F.O. LIGHT GUIDE	8 mm (dia.)	11 mm (dia.)
LIGHT WAVELENGTH	440~480 nm	390~430 nm 440~480 nm
APPLICATION	General	General / Ortho
MODE	TACK	N/A
	TURBO	1,500 mW/cm ² for 5 seconds ±10%
	3' + 3'	N/A
	6' + 6'	N/A
	FULL	1,200 mW/cm ² for 5, 10, 15, 20 seconds ±10%
	RAMP	1 st five seconds from 0 1,200 mW/cm ² next 5, 10, 15, 20 seconds 1,200 mW/cm ² ±10%
	SOFT CURE	1 st five seconds from 0 900 mW/cm ² next 5, 10, 15, 20, 25 seconds 900 mW/cm ² ±10%
WEIGHT	205 gms	200 gms
LENGTH	260 mm	265 mm

CURING LIGHT MODE APPLICATIONS	
TACK	Tack cure, a very short initial curing for temporary processing before final cure. For example, veneer bonding or temporary cement for in position and easy removal of excess material.
TURBO	Super fast curing for resin and composite under 2 mm thickness. Also recommended for ceramic brackets, veneer bonding etc.
3' + 3'	3 Seconds Mesial + 3 Seconds Distal for metal brackets resin bonding. (with 1 second blink in between)
6' + 6'	6 Seconds Mesial + 6 Seconds Distal for metal brackets with bonding resin requiring more curing time, and buccal tubes bonding. (with 1 second blink in between)
FULL	For general applications.
RAMP	With first 0 5 seconds ramping for general application.
SOFT CURE	With first 0 5 seconds ramping for more gentle processing, designed for the patients sensitive to the heat.

C01-C / C01-D CURING LIGHT DEPTH OF CURE						
MODEL	C01-C (classic) Curing Time	Depth Measurements	ISO 4049 Depth Measurements (-50%)	C01-D (dual range) Curing Time	Depth Measurements	ISO 4049 Depth Measurements (-50%)
TURBO	5 seconds	4.2 mm	2.10 mm	4 seconds	4.3 mm	2.15 mm
FULL	10 seconds	4.3 mm	2.15 mm	10 seconds	4.4 mm	2.20 mm
RAMP	10 seconds	4.1 mm	2.05 mm	10 seconds	4.2 mm	2.10 mm
SOFT CURE	15 seconds	4.6 mm	2.30 mm	15 seconds	4.6 mm	2.30 mm

REMARKS:


Above data is based on test results using an A2 shade composite. The light tip was placed above and pointed perpendicular to the composite. Tests were done as per ISO 4049 Standard. The samples were measured and the data was divided by two (50% of the total composite depth cured). ISO 4049 Standard requires that the results for class II restorative materials should be at least 1.5 mm for non-opaque shades and 1.0 mm for opaque shades. All resins and composites have different curing times. It is recommended that you should test your resins and composites performance to determine curing times required.

C01 Complete Set
with Built-In
Light Intensity
Indicator



063
Protective Hand
Light Shield
£21.95


C01-C Curing Light (Classic) with 8 mm Light Guide £195.00
C01-D Curing Light (Dual Range) with 11 mm Light Guide £245.00
C01-C-1 8 mm Fibre Optic Light Guide £44.95
C01-S/D-1 11 mm Fibre Optic Light Guide £99.95
C01/2-1 Replacement Battery £49.95
123S Light Sleeves Small (for C01-C) 500 pcs/box £24.95
123L Light Sleeves Large (for C01-S/C01-D) 500 pcs/box £29.95



24 MONTH
WARRANTY

For every
C01 Curing Light
purchased (any model)
get
one 063 Hand Shield
FREE

C02 LED CURING LIGHTS 90° right angle direct light source head

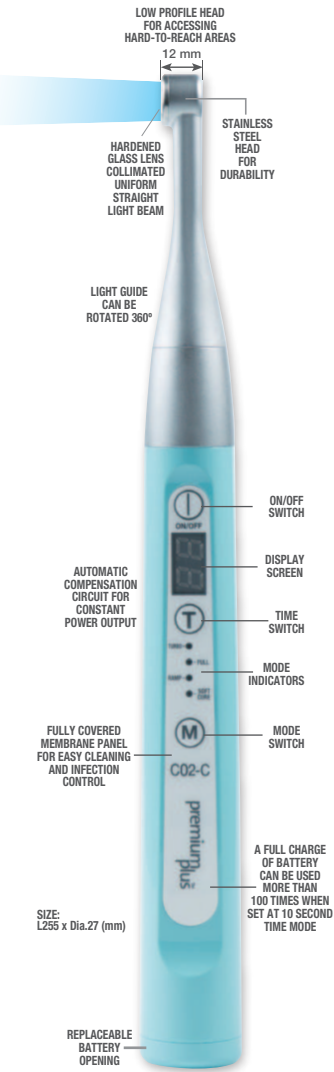

C02 SPECIFICATIONS			
Model		C02-C (classic)	C02-D (dual range)
DIRECT LIGHT HEAD		10 mm (dia.)	
LIGHT WAVELENGTH		440~480 nm	390~430 nm 440~480 nm
APPLICATION		General	General / Ortho
MODE	TACK	N/A	900 mW/cm ² for 1 second±10%
	TURBO	1,500 mW/cm ² for 5 seconds ±10%	2,000 mW/cm ² for 4 seconds±10%
	3' + 3'	N/A	2,500 mW/cm ² for 3 + 3 seconds±10% (with 1 second blink in between)
	6' + 6'	N/A	1,500 mW/cm ² for 6 + 6 seconds±10% (with 1 second blink in between)
	FULL	1,200 mW/cm ² for 5, 10, 15, 20 seconds±10%	
	RAMP	1 st five seconds from 0 1,200 mW/cm ² next 5, 10, 15, 20 seconds 1,200 mW/cm ² ±10%	
SOFT CURE		1 st five seconds from 0 900 mW/cm ² next 5, 10, 15, 20, 25 seconds 900 mW/cm ² ±10%	
WEIGHT		185 gms	185 gms
LENGTH		255 mm	255 mm

CURING LIGHT MODE APPLICATIONS	
TACK	Tack cure, a very short initial curing for temporary processing before final cure. For example, veneer bonding or temporary cement for in position and easy removal of excess material.
TURBO	Super fast curing for resin and composite under 2 mm thickness. Also recommended for ceramic brackets, veneer bonding etc.
3' + 3'	3 Seconds Mesial + 3 Seconds Distal for metal brackets resin bonding. (with 1 second blink in between)
6' + 6'	6 Seconds Mesial + 6 Seconds Distal for metal brackets with bonding resin requiring more curing time, and buccal tubes bonding. (with 1 second blink in between)
FULL	For general applications.
RAMP	With first 0 5 seconds ramping for general application.
SOFT CURE	With first 0 5 seconds ramping for more gentle processing, designed for the patients sensitive to the heat.

C02-C / C02-D CURING LIGHT DEPTH OF CURE						
MODEL	C02-C (classic) Curing Time	Depth Measurements	ISO 4049 Depth Measurements (-50%)	C02-D (dual range) Curing Time	Depth Measurements	ISO 4049 Depth Measurements (-50%)
TURBO	5 seconds	4.4 mm	2.20 mm	3 seconds	4.5 mm	2.25 mm
FULL	10 seconds	5.1 mm	2.55 mm	10 seconds	5.2 mm	2.60 mm
RAMP	10 seconds	4.8 mm	2.40 mm	10 seconds	4.9 mm	2.45 mm
SOFT CURE	15 seconds	5.0 mm	2.50 mm	15 seconds	5.1 mm	2.55 mm


REMARKS:

Above data is based on test results using an A2 shade composite. The light tip was placed above and pointed perpendicular to the composite. Tests were done as per ISO 4049 Standard. The samples were measured and the data was divided by two (50% of the total composite depth cured). ISO 4049 Standard requires that the results for class II restorative materials should be at least 1.5 mm for non-opaque shades and 1.0 mm for opaque shades. All resins and composites have different curing times. It is recommended that you should test your resins and composites performance to determine curing times required.

10 colours available:



C02 Complete Set with Built-In Light Intensity Indicator



C02-C (Classic) Curing Light with 10 mm Light Head £225.00
 C02-D (Dual Range) Curing Light with 10 mm Light Head £275.00
 C02-C-1 (Classic) Direct Light Source Head £64.95
 C02-S-1 (Super Power) Direct Light Source Head £99.95
 C02-D-1 (Dual Range) Direct Light Source Head £99.95
 C01/2-1 Replacement Battery £49.95
 125 Light Sleeves (for C02-C/S/D) 500 pcs/box £24.95
 C02-3N Heat Protect Rings, 6 pcs/pack £24.95

24 MONTH WARRANTY

For every C02 Curing Light purchased (any model) get one 063 Hand Shield FREE



C01-M / C02-M LED CURING LIGHTS MINI (with USB charger)

- 360° Rotatable tips
- Automatic compensation circuit for constant power output
- Fully covered membrane panel for easy cleaning and infection control
- Light weight: approx. 85 gms
- Dual modes: FULL / SOFT
- 12 Operation times
- Fully charged battery provides over 100 x 10 second curing cycles

C01-M / C02-M SPECIFICATIONS

Model	C01-M (F.O. Light Guide)	C02-M (Direct Light Source)
LIGHT TIP	8 mm (dia.)	11 mm (dia.)
LIGHT WAVELENGTH	440~480 nm	440~480 nm
MODE	FULL	1,200 mW/cm ² for 5, 10, 15, 20, 25, 30 seconds±10%
	SOFT	1 st five seconds from 0 900 mW/cm ² next 5, 10, 15, 20, 25 seconds 900 mW/cm ² ±10%
WEIGHT	86 gms	84 gms
LENGTH	230 mm	220 mm

C01-M / C02-M CURING LIGHT DEPTH OF CURE

MODEL MODE	C01-M (F.O. Light Guide) Curing Time	Depth Measurements	ISO 4049 Depth Measurements (~50%)	C02-M (Direct Light Source) Curing Time	Depth Measurements	ISO 4049 Depth Measurements (~50%)
FULL	10 seconds	4.3 mm	2.15 mm	10 seconds	5.1 mm	2.55 mm
SOFT	15 seconds	4.6 mm	2.30 mm	15 seconds	4.8 mm	2.40 mm

REMARKS: Above data is based on test results using an A2 shade composite. The light tip was placed above and pointed perpendicular to the composite. Tests were done as per ISO 4049 Standard. The samples were measured and the data was divided by two (50% of the total composite depth cured). ISO 4049 Standard requires that the results for class II restorative materials should be at least 1.5 mm for non-opaque shades and 1.0 mm for opaque shades. All resins and composites have different curing times. It is recommended that you should test your resins and composites performance to determine the curing times required.



C01-M Curing Light (F.O. Light Guide) £99.95
 C02-M Curing Light (Direct Light Head) £125.00
 C01-M F.O. Light Guide 8 mm £44.95
 C02-M Direct Light Head 11 mm £64.95
 C01-M/C02-M Replacement Battery £39.95
 228 Light Sleeves Mini 500 pcs/box £24.95
 USB Main Plug Charger £5.95

24 MONTH WARRANTY



063 Light Protective
Hand Shield
£21.95

C01-M/C02-M
 For every
 Curing Light purchased
 get
 one 063 Hand Shield
 FREE



REFINE Non-LED / LED TABLE TOP SCALERS




Colour:
White

SPECIAL

MaxPiezo 6	£165.00
MaxPiezo 6+	£195.00
MaxPiezo DS6	£165.00
MaxPiezo DS6+	£205.00

- Automatic frequency tracking, real-time feedback
- Power and water controlled by touch panel, easy to clean for infection control
- Detachable handpiece
- Frequency: 28 kHz $\pm$ 3 kHz
- Complete with 6 tips
- Size: W155mm x D168mm x H80mm
- Weight: 0.6 kg (unit only)

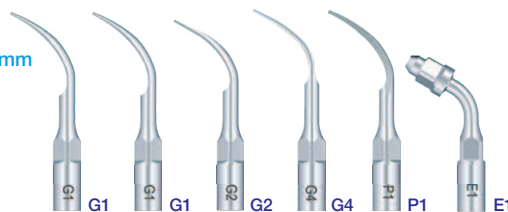

ONE YEAR WARRANTY
(excludes scaler tips)

MaxPiezo 6 (EMS ¹ , WOODPECKER ⁷ Type) Non-LED Scaler Set ...	£235.00
MaxPiezo 6+ (EMS ¹ , WOODPECKER ⁷ Type) LED Scaler Set	£285.00
MaxPiezo DS6 (SATELEC ² , DTE ⁷ Type) Non-LED Scaler Set	£245.00
MaxPiezo DS6+ (SATELEC ² , DTE ⁷ Type) LED Scaler Set	£295.00

REFINE Non-LED / LED PORTABLE SCALERS




Colour:
White

SPECIAL

MaxPiezo 7	£255.00
MaxPiezo 7+	£305.00
MaxPiezo DS7	£275.00
MaxPiezo DS7+	£325.00

- Automatic frequency tracking, real-time feedback
- Extra large, capacity 600 ml water tank for water, chlorhexidine, hydrogen peroxide, sodium hypochlorite etc...
- Power and water controlled by touch panel, easy to clean for infection control
- Detachable handpiece
- Frequency: 28 kHz $\pm$ 3 kHz
- Complete with 8 tips
- Size: W180mm x D180mm x H150mm
- Weight: 1.6 kg (unit only)

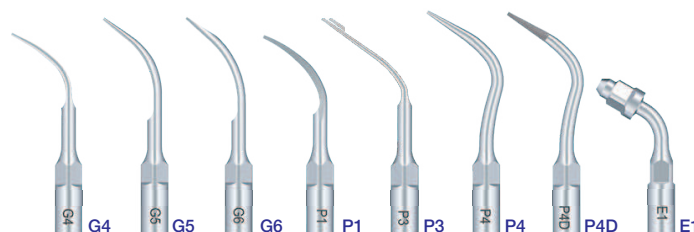

ONE YEAR WARRANTY
(excludes scaler tips)

MaxPiezo 7 (EMS ¹ , WOODPECKER ⁷ Type) Portable Non-LED Scaler Set ...	£495.00
MaxPiezo 7+ (EMS ¹ , WOODPECKER ⁷ Type) Portable LED Scaler Set	£545.00
MaxPiezo DS7 (SATELEC ² , DTE ⁷ Type) Portable Non-LED Scaler Set	£545.00
MaxPiezo DS7+ (SATELEC ² , DTE ⁷ Type) Portable LED Scaler Set	£595.00


REFINE Non-LED / LED BUILT-IN SCALERS



SPECIAL

N3000	£155.00
N3000L	£165.00
V3000	£165.00
V3000L	£175.00

- Automatic frequency tracking, real-time feedback
- Detachable handpiece
- Frequency: 28 KHz $\pm$ 3 KHz
- Complete with 6 tips

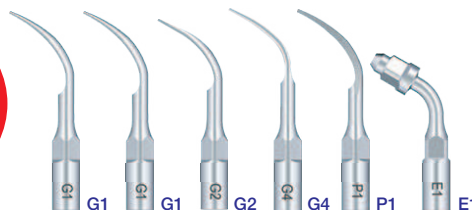

ONE YEAR WARRANTY
(excludes scaler tips)

N3000 (EMS ¹ , WOODPECKER ⁷ Type) Built-In Non-LED Scaler Set ...	£235.00
N3000L (EMS ¹ , WOODPECKER ⁷ Type) Built-In LED Scaler Set	£285.00
V3000 (SATELEC ² , DTE ⁷ Type) Built-In Non-LED Scaler Set	£245.00
V3000L (SATELEC ² , DTE ⁷ Type) Built-In LED Scaler Set	£295.00

1. EMS is a registered trademark of Electro Medical System S.A. Switzerland
2. SATELEC is a registered trademark of Satelec/Acteon Group France
7. WOODPECKER and DTE are registered trademark of Guilin Woodpecker Medical Instrument Company Ltd

C3RK MOBILE CART




- Attractive design and durable construction
- 4 outlet sockets for use with electrical devices
- 3 shelf trolley
- Round shelves for safety and hygiene
- Table size: W40 cm x D30 cm
- Over all height: 78 cm
- Height between shelves: 27.5 cm

C3RK Mobile Cart £245.00


REFINE SCALER TIPS STAINLESS STEEL

FOR EMS¹, SATELEC², NSK³, SIRONA⁴, WOODPECKER⁷ and DTE⁷ REFINE Type Scalers


SCALING




G1 (EMS¹, WOODPECKER⁷ Type)
GD1 (SATELEC², NSK³, DTE⁷ Type)
GS1 (SIRONA⁴ Type)
Supragingival deposits
in all quadrants




G2 (EMS¹, WOODPECKER⁷ Type)
GD2 (SATELEC², NSK³, DTE⁷ Type)
GS2 (SIRONA⁴ Type)
Heavy supragingival
deposits on anterior teeth




G3 (EMS¹, WOODPECKER⁷ Type)
GD3 (SATELEC², NSK³, DTE⁷ Type)
GS3 (SIRONA⁴ Type)
Supragingival deposits
in all quadrants, including
the interproximal and
sulcus areas



G4 (EMS¹, WOODPECKER⁷ Type)
GD4 (SATELEC², NSK³, DTE⁷ Type)
GS4 (SIRONA⁴ Type)
Supragingival and
interproximal deposits



G5 (EMS¹, WOODPECKER⁷ Type)
GD5 (SATELEC², NSK³, DTE⁷ Type)
GS5 (SIRONA⁴ Type)
Supragingival deposits
in all quadrants




G6 (EMS¹, WOODPECKER⁷ Type)
GD6 (SATELEC², NSK³, DTE⁷ Type)
GS6 (SIRONA⁴ Type)
Voluminous supragingival
deposits




E1 (EMS¹, WOODPECKER⁷ Type)
ED1 (SATELEC², NSK³, DTE⁷ Type)
ES1 (SIRONA⁴ Type)
120° file holder for anterior
root canal irrigation




E2 (EMS¹, WOODPECKER⁷ Type)
ED2 (SATELEC², NSK³, DTE⁷ Type)
ES2 (SIRONA⁴ Type)
95° file holder for molar teeth
root canal irrigation




E3 (EMS¹, WOODPECKER⁷ Type)
ED3 (SATELEC², NSK³, DTE⁷ Type)
ES3 (SIRONA⁴ Type)
Gutta-percha melting




E3D (EMS¹, WOODPECKER⁷ Type)
ED3D (SATELEC², NSK³, DTE⁷ Type)
ES3D (SIRONA⁴ Type)
Instrument for root canal enlarging,
diamond coating (fine, 40µm)



P4D (EMS¹, WOODPECKER⁷ Type)
PD4D (SATELEC², NSK³, DTE⁷ Type)
PS4D (SIRONA⁴ Type)
Instrument for root canal enlarging,
diamond coating (fine, 40µm)




E14 (EMS¹, WOODPECKER⁷ Type)
ED14 (SATELEC², NSK³, DTE⁷ Type)
ES14 (SIRONA⁴ Type)
Removing root filling
obstructions during
root canal retreatments




E15 (EMS¹, WOODPECKER⁷ Type)
ED15 (SATELEC², NSK³, DTE⁷ Type)
ES15 (SIRONA⁴ Type)
Removing root filling
obstructions during
root canal retreatments


ENDO



E4 (EMS¹, WOODPECKER⁷ Type)
ED4 (SATELEC², NSK³, DTE⁷ Type)
ES4 (SIRONA⁴ Type)
Removing root filling
obstructions during
root canal retreatment



E4D (EMS¹, WOODPECKER⁷ Type)
ED4D (SATELEC², NSK³, DTE⁷ Type)
ES4D (SIRONA⁴ Type)
Removing calcification and
filling material during
root canal retreatment,
diamond coating (fine, 40µm)




E5 (EMS¹, WOODPECKER⁷ Type)
ED5 (SATELEC², NSK³, DTE⁷ Type)
ES5 (SIRONA⁴ Type)
Removing root filling
obstructions during
root canal retreatment




E5D (EMS¹, WOODPECKER⁷ Type)
ED5D (SATELEC², NSK³, DTE⁷ Type)
ES5D (SIRONA⁴ Type)
Removing calcification and
filling material during
root canal retreatment,
diamond coating (fine, 40µm)

Buy 2
get
1 FREE
(same item)

FOR AMDENT⁶ Type Scalers

A1 (AMDENT⁶ Type)
Supragingival scaling
(#37)




A2 (AMDENT⁶ Type)
Supragingival scaling
(#39)


1. EMS is a registered trademark of Electro Medical System S.A. Switzerland
2. SATELEC is a registered trademark of Satelec/Acteon Group France
3. NSK is a registered trademark of Nakanishi Inc. Japan
4. SIRONA is a registered trademark of Sirona Dental System
7. WOODPECKER and DTE are registered trademark of Guilin Woodpecker Medical Instrument Company Ltd

REFINE SCALER TIPS STAINLESS STEEL


FOR EMS¹, SATELEC², NSK³, SIRONA⁴, WOODPECKER⁷ and DTE⁷ REFINE Type Scalers




P1 (EMS¹, WOODPECKER⁷ Type)
PD1 (SATELEC², NSK³, DTE⁷ Type)
PS1 (SIRONA⁴ Type)
Shallow pocket
subgingival deposits



P3 (EMS¹, WOODPECKER⁷ Type)
PD3 (SATELEC², NSK³, DTE⁷ Type)
PS3 (SIRONA⁴ Type)
Deep pocket
subgingival deposits



P4 (EMS¹, WOODPECKER⁷ Type)
PD4 (SATELEC², NSK³, DTE⁷ Type)
PS4 (SIRONA⁴ Type)
Shallow pocket
subgingival deposits



P3D (EMS¹, WOODPECKER⁷ Type)
PD3D (SATELEC², NSK³, DTE⁷ Type)
PS3D (SIRONA⁴ Type)
instrument for root planing after
periodontal flap surgery,
diamond coating (fine, 40µm)


PERIO




P2L (EMS¹, WOODPECKER⁷ Type)
PD2L (SATELEC², NSK³, DTE⁷ Type)
Left angle instrument to remove
calculus from very narrow
inter-root space and furcation



P2R (EMS¹, WOODPECKER⁷ Type)
PD2R (SATELEC², NSK³, DTE⁷ Type)
Right angle instrument to remove
calculus from very narrow
inter-root space and furcation




P2LD (EMS¹, WOODPECKER⁷ Type)
PD2LD (SATELEC², NSK³, DTE⁷ Type)
Removal of calculus from narrow
inter-root spaces,
diamond coating (fine, 40µm)



P2RD (EMS¹, WOODPECKER⁷ Type)
PD2RD (SATELEC², NSK³, DTE⁷ Type)
Instrument for root planing,
diamond coating (fine, 40µm)


FOR KAVO SONICflex⁵ Type Scalers




GK1 (KAVO⁵ Type)
Supragingival deposits
in all quadrants




GK2 (KAVO⁵ Type)
Supragingival heavy
calculus and plaque




GK3 (KAVO⁵ Type)
Supragingival interdental
calculus and calculus
at the neck of the tooth




GK4 (KAVO⁵ Type)
Supragingival deposits,
including the interproximal
and sulcus areas



GK5 (KAVO⁵ Type)
Subgingival calculus




GK6 (KAVO⁵ Type)
Left angle instrument for
removing subgingival
calculus



GK7 (KAVO⁵ Type)
Right angle instrument for
removing subgingival
calculus


FOR KAVO SONOsoft⁵ Type Scalers



GC1 (KAVO⁵ Type)
Supragingival deposits
in all quadrants




GC2 (KAVO⁵ Type)
Supragingival interdental
calculus and calculus
at the neck of the tooth




PC1 (KAVO⁵ Type)
Subgingival calculus,
including the interproximal
and sulcus areas


KAVO PiezoLED⁵ Type Scalers




201 (KAVO⁵ PiezoLED⁵ Type)
Supragingival and
interproximal deposits




202 (KAVO⁵ PiezoLED⁵ Type)
Supragingival deposits
in all quadrants,
including the interproximal
and sulcus areas



203 (KAVO⁵ PiezoLED⁵ Type)
Deep pocket subgingival
deposits




222 (KAVO⁵ PiezoLED⁵ Type)
120° file holder for anterior teeth
root canal irrigation




225 (KAVO⁵ PiezoLED⁵ Type)
Rounded plastic cover, gentle
and secure placement of inlay

Plastic cover each £7.95



210 (KAVO⁵ PiezoLED⁵ Type)
Instrument for root planing after
the periodontal flap surgery,
diamond coating (x-fine, 18µm)



211 (KAVO⁵ PiezoLED⁵ Type)
Instrument for root planing after the
periodontal flap surgery,
diamond coating (medium-fine, 70µm)



229 (KAVO⁵ PiezoLED⁵ Type)
Instrument for preparation of
pit and fissure sealant,
diamond coating (medium, 90µm)

Buy 2
get
1 FREE
(same item)

1. EMS is a registered trademark of Electro Medical System S.A. Switzerland
2. SATELEC is a registered trademark of Satelec/Acteon Group France
3. NSK is a registered trademark of Nakanishi Inc. Japan
4. SIRONA is a registered trademark of Sirona Dental System
5. KAVO, SONICflex, SONOsoft, PiezoLED are registered trademarks of Kavo Dental GmbH Germany
6. AMDENT is a registered trademark of Amdent AB Sweden
7. WOODPECKER and DTE are registered trademark of Guilin Woodpecker Medical Instrument Company Ltd

REFINE Non-LED / LED AUTOCLAVABLE SCALER HANDPIECE KITS



- Complete with:-
- 1x Handpiece 3H / 5L / 7H / 7L
- 3x Perio scaler tip P1 / PD1
- 1x Torque wrench TW-1L
- 1x Scaler tip holder No.1
- 1x Sterilization box

3H Non-LED Handpiece Kit (EMS Type) £265.00
 7H Non-LED Handpiece Kit (SATELEC Type) £315.00
 5L LED Handpiece Kit (EMS Type) £295.00
 7L LED Handpiece Kit (SATELEC Type) £295.00



ONE YEAR WARRANTY
 (excludes scaler tips)

SPECIAL

3H Kit £99.95
 7H Kit £109.95
 5L(LED) Kit £109.95
 7L(LED) Kit £109.95

REFINE AUTOCLAVABLE SCALER HANDPIECES



HP-3H Non-LED Scaler Handpiece (EMS¹, WOODPECKER⁷ Type) ... £104.95



HS-7H Non-LED Scaler Handpiece (SATELEC², NSK³, DTE⁷ Type) ... £114.95



HP-5L LED Scaler Handpiece (EMS¹, WOODPECKER⁷ Type) ... £114.95



HS-7L LED Scaler Handpiece (SATELEC², NSK³, DTE⁷ Type) ... £124.95



HP-5L(K2) LED Scaler Handpiece (KAVO⁵ Type) ... £234.95

REFINE AUTOCLAVABLE SCALER TORQUE WRENCHES



TW-1L
 For REFINE, EMS¹,
 SATELEC², NSK³,
 KAVO⁵, PiezoLED⁵
 WOODPECKER⁷,
 DTE⁷ Type scaler
 each £10.95



TS-1L
 for SIRONA⁴
 Type scaler
 each £12.95



TK-1L
 for KAVO⁵
 SONICflex⁵,
 SONOsoft⁵,
 Type scaler
 each £12.95



3H Non-LED (EMS¹, WOODPECKER⁷ Type)
 Handpiece Hose ... £39.95



7H Non-LED (SATELEC², DTE⁷ Type)
 Handpiece Hose ... £39.95



5L LED (EMS¹, WOODPECKER⁷ Type)
 Handpiece Hose ... £49.95



7L LED (SATELEC², DTE⁷ Type)
 Handpiece Hose ... £49.95

REFINE SCALER ACCESSORIES



Endo Wrench
 each £11.95

- Multi function wrench for both endo chuck & bur
- Autoclavable up to 134°C



E04 ULTRASONIC FILES NiTi alloy

E04 ULTRASONIC FILES NiTi alloy			
Length	#15	#30	
33 mm	#20	#35	
	#25	#40	

E04 Ultrasonic Files 33 mm Single Size
 6 pcs/pack ... £5.95

- Excellent tenacity



Solenoid Valve
 each £32.95



Foot Switch
 each £32.95



Power Supply
 each £54.95

1. EMS is a registered trademark of Electro Medical System S.A. Switzerland
2. SATELEC is a registered trademark of Satelec/Acteon Group France
3. NSK is a registered trademark of Nakanishi Inc. Japan
4. SIRONA is a registered trademark of Sirona Dental System
5. KAVO, SONICflex, SONOsoft, PiezoLED are registered trademarks of Kavo Dental GmbH Germany
7. WOODPECKER and DTE are registered trademark of Guilin Woodpecker Medical Instrument Company Ltd


JINME ES70 SURGICAL DRIVE SYSTEM WITH IMPLANT FUNCTION

ES70 Surgical Drive System with Implant Function is an advanced system offering exceptional precision and reliability, making it an ideal choice for various dental procedures such as extractions, restorations, polishing, caries removal, and implants.

- **Bright LED display screen**
- **Compact Design:** Main unit dimensions of 260mm x 240mm x 110mm, perfect for seamless integration into any dental workspace.
- **Includes 4x LED handpieces with internal water spray:**
 - 1x Electric Surgical High-Speed Handpiece (1:4.2)
 - 1x Electric High-Speed Contra-Angle Handpiece (1:5)
 - 1x Electric Low-Speed Handpiece (1:1)
 - 1x Electric Implant Handpiece (40:1)
- **Wide Motor Speed Range:** Adjustable motor speeds from 0 to 40,000 RPM to meet the demands of different dental procedures.
- **High-Quality Motor Rotation Modes:** Forward and reverse rotation modes for enhanced control during procedures.
- **Efficient Power Consumption:** Maximum power usage of 180VA, with a rated motor voltage of DC32V for consistent performance.

12 MONTH WARRANTY

DW2670 Surgical Drive System with Implant Function £3695.00

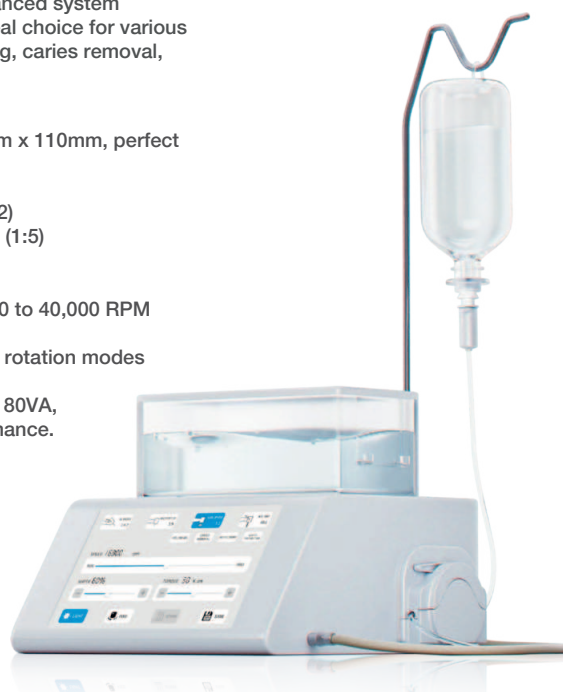

SPECIAL
DW2670
£3,295.00




JINME E1 EXTERNAL ELECTRIC MICROMOTOR BRUSHLESS



DURR VISTASCAN IMAGING PLATES SIZE 2



SPECIAL
DW2620
£595.95



Brushless table top electric micro motor set complete with 2 handpieces, connects directly to 4-hole Midwest cable.

- **Real-time LED display** of speed provides more accurate treatment with adjustable luminance for ideal working conditions.
- **Quiet operation:** ≤ 60dB making procedures more comfortable for patients, especially in paediatric dentistry.
- **Includes 2x LED handpieces with internal water spray:**
 - 1x Electric LED High-Speed Contra-Angle Handpiece (1:5)
 - 1x Electric LED Low-Speed Handpiece (1:1)

12 MONTH WARRANTY

DW2620 Table Top Micromotor Set £695.95

- **Convenient pack of 4x plates:** Size 2 (30 mm x 40 mm)
- **Size 2 are perfectly suited for:**
 - Lateral-tooth or bite-wing images for adults
 - Front-tooth images with wide spacing for adults
 - Endo-images with wide spacing
- **Excellent image quality on 100% active area**
- **Patient comfort** – thin, flexible image plate ensures patient comfort is maximised. Easy to position even in difficult situations
- **Automatic tooth detection / image allocation and image rotation** when paired with VistaSoft 3.0.20 or higher
- **Reliable companion** for all VistaScan without RFID function

DW1992 Durr VistaScan Imaging Plast S2 (4 pack) £265.95

Terms and Conditions

All prices shown are VAT exclusive. All prices, including delivery, special deals and products are subject to change without prior notice. Premium Plus reserves the right to correct errors and omissions in any of our advertising (paper or electronic). Catalogues (prices and specials) will be deemed to be superseded on the issue of the most recent catalogue/ flyer. Goods will not be accepted for return without prior authorisation. Customers must notify Premium Plus of a return within 7 days from the date of delivery. Returned goods received after this time or without prior authorisation may not be accepted. Costs incurred for the return of goods will be at the Customers expense, except in cases of incorrectly supplied or faulty goods. Returned goods must be in a re-saleable condition (inclusive of all original packaging, unopened and unused). Credit accounts are due strictly 30 days from the invoice date. In the event that the Customer fails to pay any monies by the due date, interest may be charged at the rate of 2% interest per month. The Customer is liable for all costs incurred by Premium Plus in the recovery of any debt, including legal fees and any other associated costs. Premium Plus retains ownership of the goods until they are paid in full. Premium Plus shall endeavour to dispatch all orders received before 3pm for either next working day delivery or 1st Class Post dependant on order weight and value. However, delivery dates and times specified are approximate only. Premium Plus cannot guarantee delivery times and will not be held liable or responsible if any timeframes cannot be met. Substitute goods may be supplied when those ordered are unavailable. Equipment warranties are as stated in catalogues/flyers or instructions and are considered void if not used as per instructions, or considered to be mistreated / incorrectly serviced or cared for.

Terms and conditions will be provided prior to opening an account and will be deemed to be accepted once the account has been opened. To view our full Terms & Conditions, Privacy Policy, Delivery and Returns policies please visit our website at www.premiumplusuk.com or contact us by phone or email. If you no longer wish to receive this mail, please call us on 0800 009 88 22 or email us at sales@premiumplusuk.com.